# SPC STONE

Stone Polymer Composite Planks




Bringing Floors to Life...









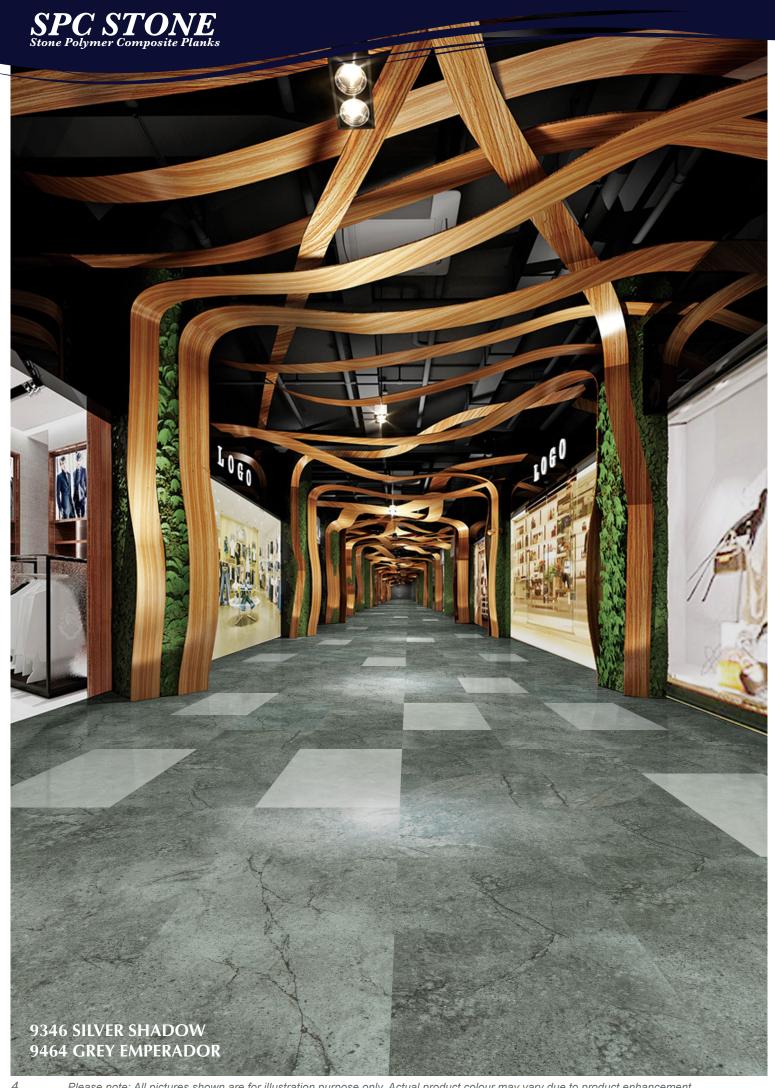













# **APPLICATION AREAS**

Ideal option for residential and commercial areas requiring easy to install & easy to clean flooring. Can be used in residences, offices, schools & universities, restaurants, retail spaces, sports centers, shopping malls.

#### **SALIENT FEATURES**

















Termite Proof

















9162 BOTTOCINO CLASSIC

# **USE OF UNDERLAY**

Use of underlay helps smoothen out minor unevenness and also provide high compressive strength. Ensures moisture protection and superior sound insulation.
















9011 VALENCIA BEIGE





9193 BLUE SAVOY

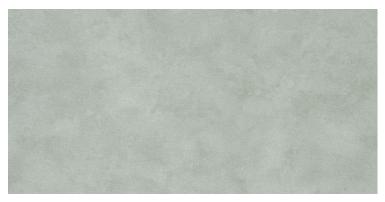

9346 SILVER SHADOW



9910 NORDIC GREY



9464 GREY EMPERADOR

### **STRUCTURE**

SPC flooring stands for Stone Polymer Composite, and consists of polyvinyl chloride, natural limestone powder and stabilisers.

Being completely formaldehyde-free, it is thus very safe for your environment.


Known for being 100% waterproof with , these engineered luxury vinyl planks use advanced technologies to beautifully mimic natural wood and stone.

SPC is a perfect combination of strength of stone and the beauty of marble flooring.

With multiple layers fused together, SPC features a rigid core which provides stability and indentation resistance, and is thus very durable as a flooring - retaining its luxurious look for decades.

SPC flooring provides a seamless look and our collection showcases a multitude of beautiful natural stone emboss options.

# **Installation Technique**








#### **SPC STONE Specifications**

Dimensions (L x W x T)

Surface
Texture
Protective Wear Layer Thickness
Core Material
Click
Edge Detail
Surface Treatment
Quantity per box in sqm/sqft
Quantity per pallet

Box dimensions Net Weight per sqm Net weight per box Gross Weight per box (23.6" x 11.8" x 1/6")
Embossed
Stone Visual
0.35 mm
White
Unilin
Square
UV Coating
12 pieces (2.160 sqm / 23.25 sqft)
72 boxes
608 mm x 308 mm x 58 mm
8.7 kgs/m²
± 18.79 kgs

600 mm x 300 mm x 4.2 mm

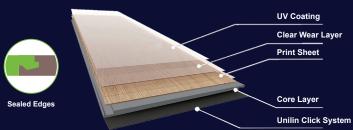

± 19.79 kgs

#### Performance

**Dimension Squareness** ≤ 0.25 m Dimension Straightness ≤ 0.25 m Flammability Class Bf1-s1 Slip Resistance Class DS **Sound Insulation** ΔLw: 5dB Color Fastness To Light Dimensional Stability to Heat Pass: ≥ Grade 6 ≤ 0.12% (80%, 6Hrs) Curling after Exposure to Heat ≤ 1.2 mm (80°C, 6Hrs) ≤ 0.015 g ≥ 2.8 Kgf/2cm E1 Wear Resistance Peel Resistance Determination of the Content of Formaldehyde Pass

Residual Indentation after Static Load Pass Flexibility Pass Measurement of Dynamic Coefficient of Fiction on Dry Floor Surfaces Resilience to Chemicals Class

Resilience to Chemicals

Fungus Test

Class 0

Class 0

Certificate

CE, SGS, ISO9001









