
EXCEL®

AIR

CARPET TILE

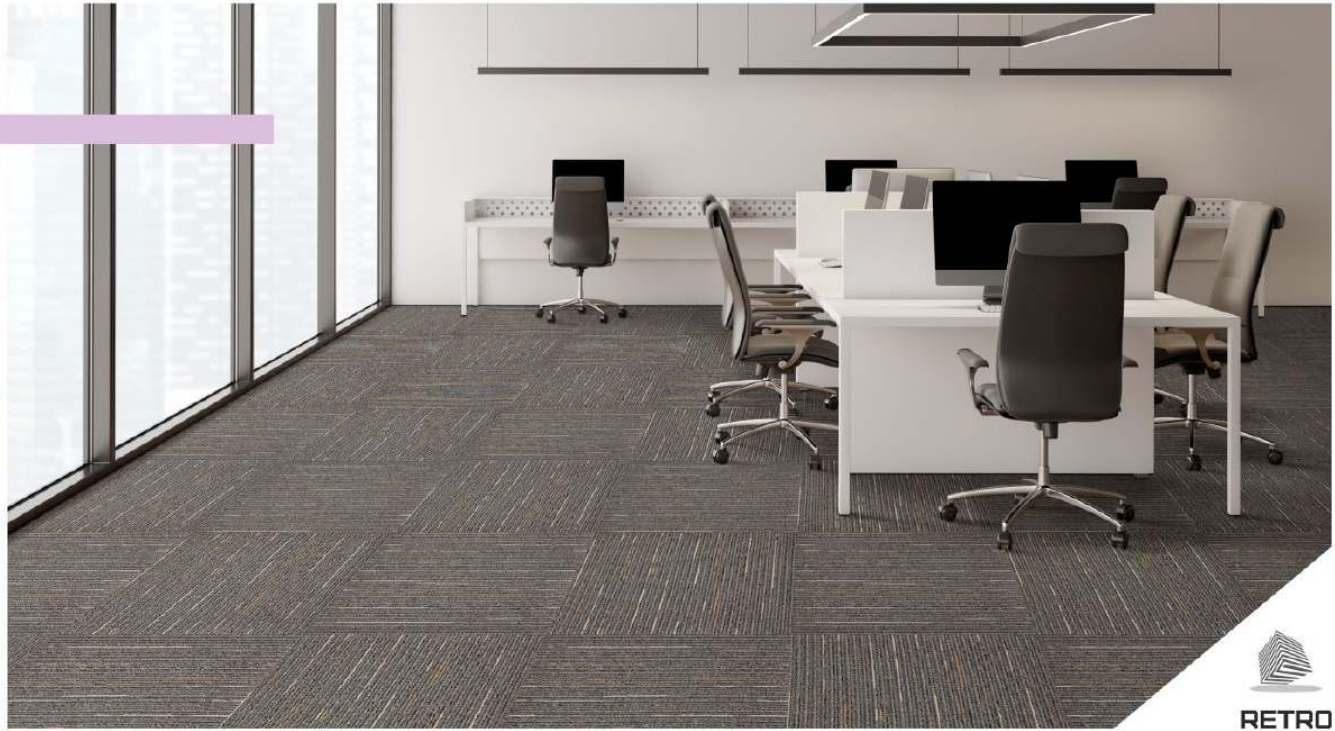

RETRO

EXCEL®

Overview
FRESH CARPET
Looks



01



02



04



06

NOTE

- Photos are showing only the design patterns.
- The color of the sample pasted is only showing part of the actual carpet.
- Specifications are subject to change when they improve product.
- Slight colour variations may occur from dye lot to dye lot.


oltmans








01 & 06

SPECIFICATION

Product Name	AIR
Construction	Multi level loop
Yarn Type	Polypropyene
Dye Method	Solution Dyed
Machine Guage	1/10"
Stitches	45
Pile Density	183300g/m³
Pile Height	4/3/2mm
Total thickness	6±1mm
Pile Weight	550±20g/sqm
Total weight	2800-3000g/sqm
Primary Backing	Non Woven
Second Backing	Bitumen
Tile Size	50x50cm
Area of use	Commercial, Residential, Hotel ,
Packing	5sqm/20pcs per box
Flammability	ASTM D2859
Smoke Density	ASTM E-662-09, <450
Dimensional Stability	ASTM D7570-09, <0.2%
Tuft Bind	24N
Static Propensity	GB/T 18044-2008
Stain Resistance	GB/T 18044-2008, 1.0KV
Colorfastness to Crocking	ASTM D5252, >5
Colorfastness to Light	ASTM D5252, >5
Indoor Air Quality	GB 18587-2001
TVOC	ISO 16000-6:2011, Grade A, <0.5mg/sqm h
Formaldehyde	GB/T 18204.2-2014, Grade A, <0.05mg/sqm h
Styrene	ISO 16000-6:2011, Grade A, <0.4mg/sqm h
4-Phenylcyclohexene	ISO 16000-6:2011, Grade A, <0.05mg/sqm h


WARRANTIES

5 YEARS GENERAL WARRANTY

EXCEL IMPORT PVT LTD hereinafter called EXCEL CLASSIC FLOORS warrants to its customer that all polypropylene carpet tiles IMPORTED by EXCEL IMPORT PVT LTD will be first quality and will be free from manufacturing defects within general accepted standard of industry. If there is a manufacturing defect, a EXCEL representative must be notified immediately by the end user in writing. Written notification must include description of said defects, together with proof of purchase to the party (seller) from whom the product was purchased. Allow 2-4 weeks for processing.

After notification to EXCEL, EXCEL representative will, if necessary, inspect and verify the defect, if such defect is verified, EXCEL will, at its option, arrange for repair or replacement of the defective carpet.

INSTALLATION METHODS

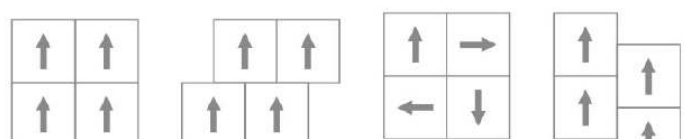

DISCLAIMERS

- According to international Carpet manufactured norms color may differ from dye lot to dye lot within tolerance.
- Please take note of the day lot number on the cartons before installing the tiles.
- Recommended laying of Carpet tiles : Checkered board pattern.