








HISTORIAS




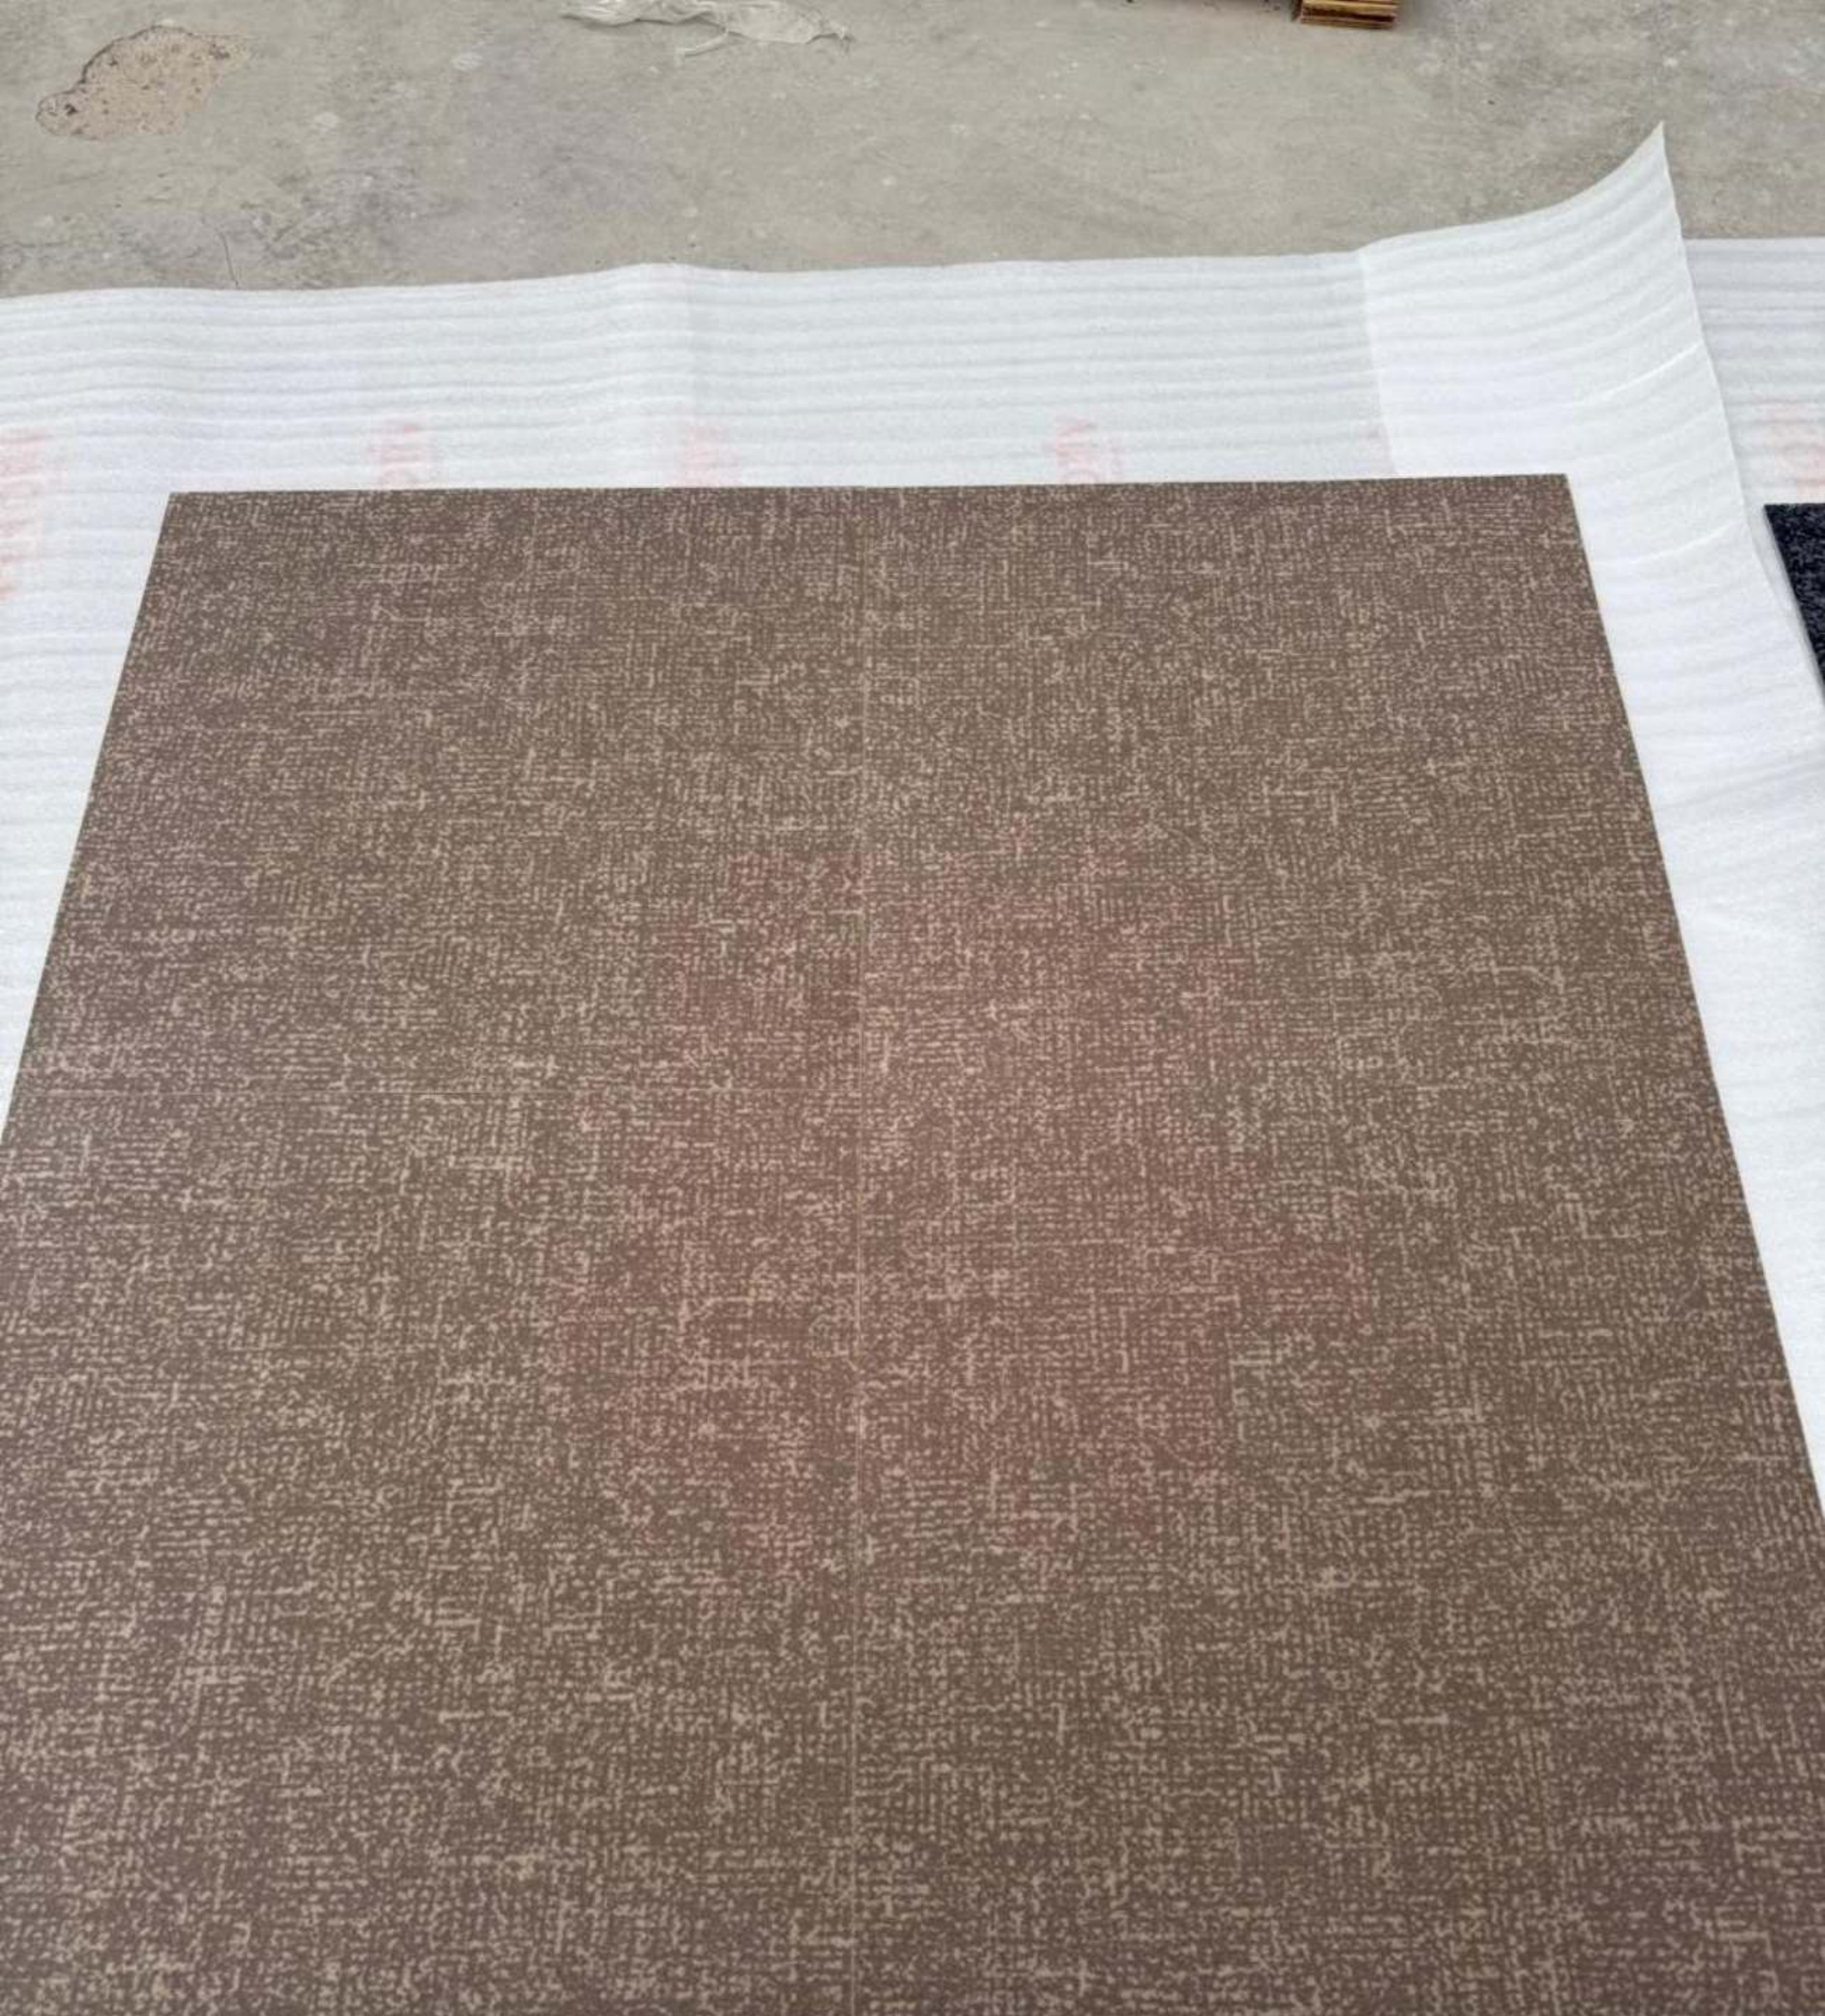


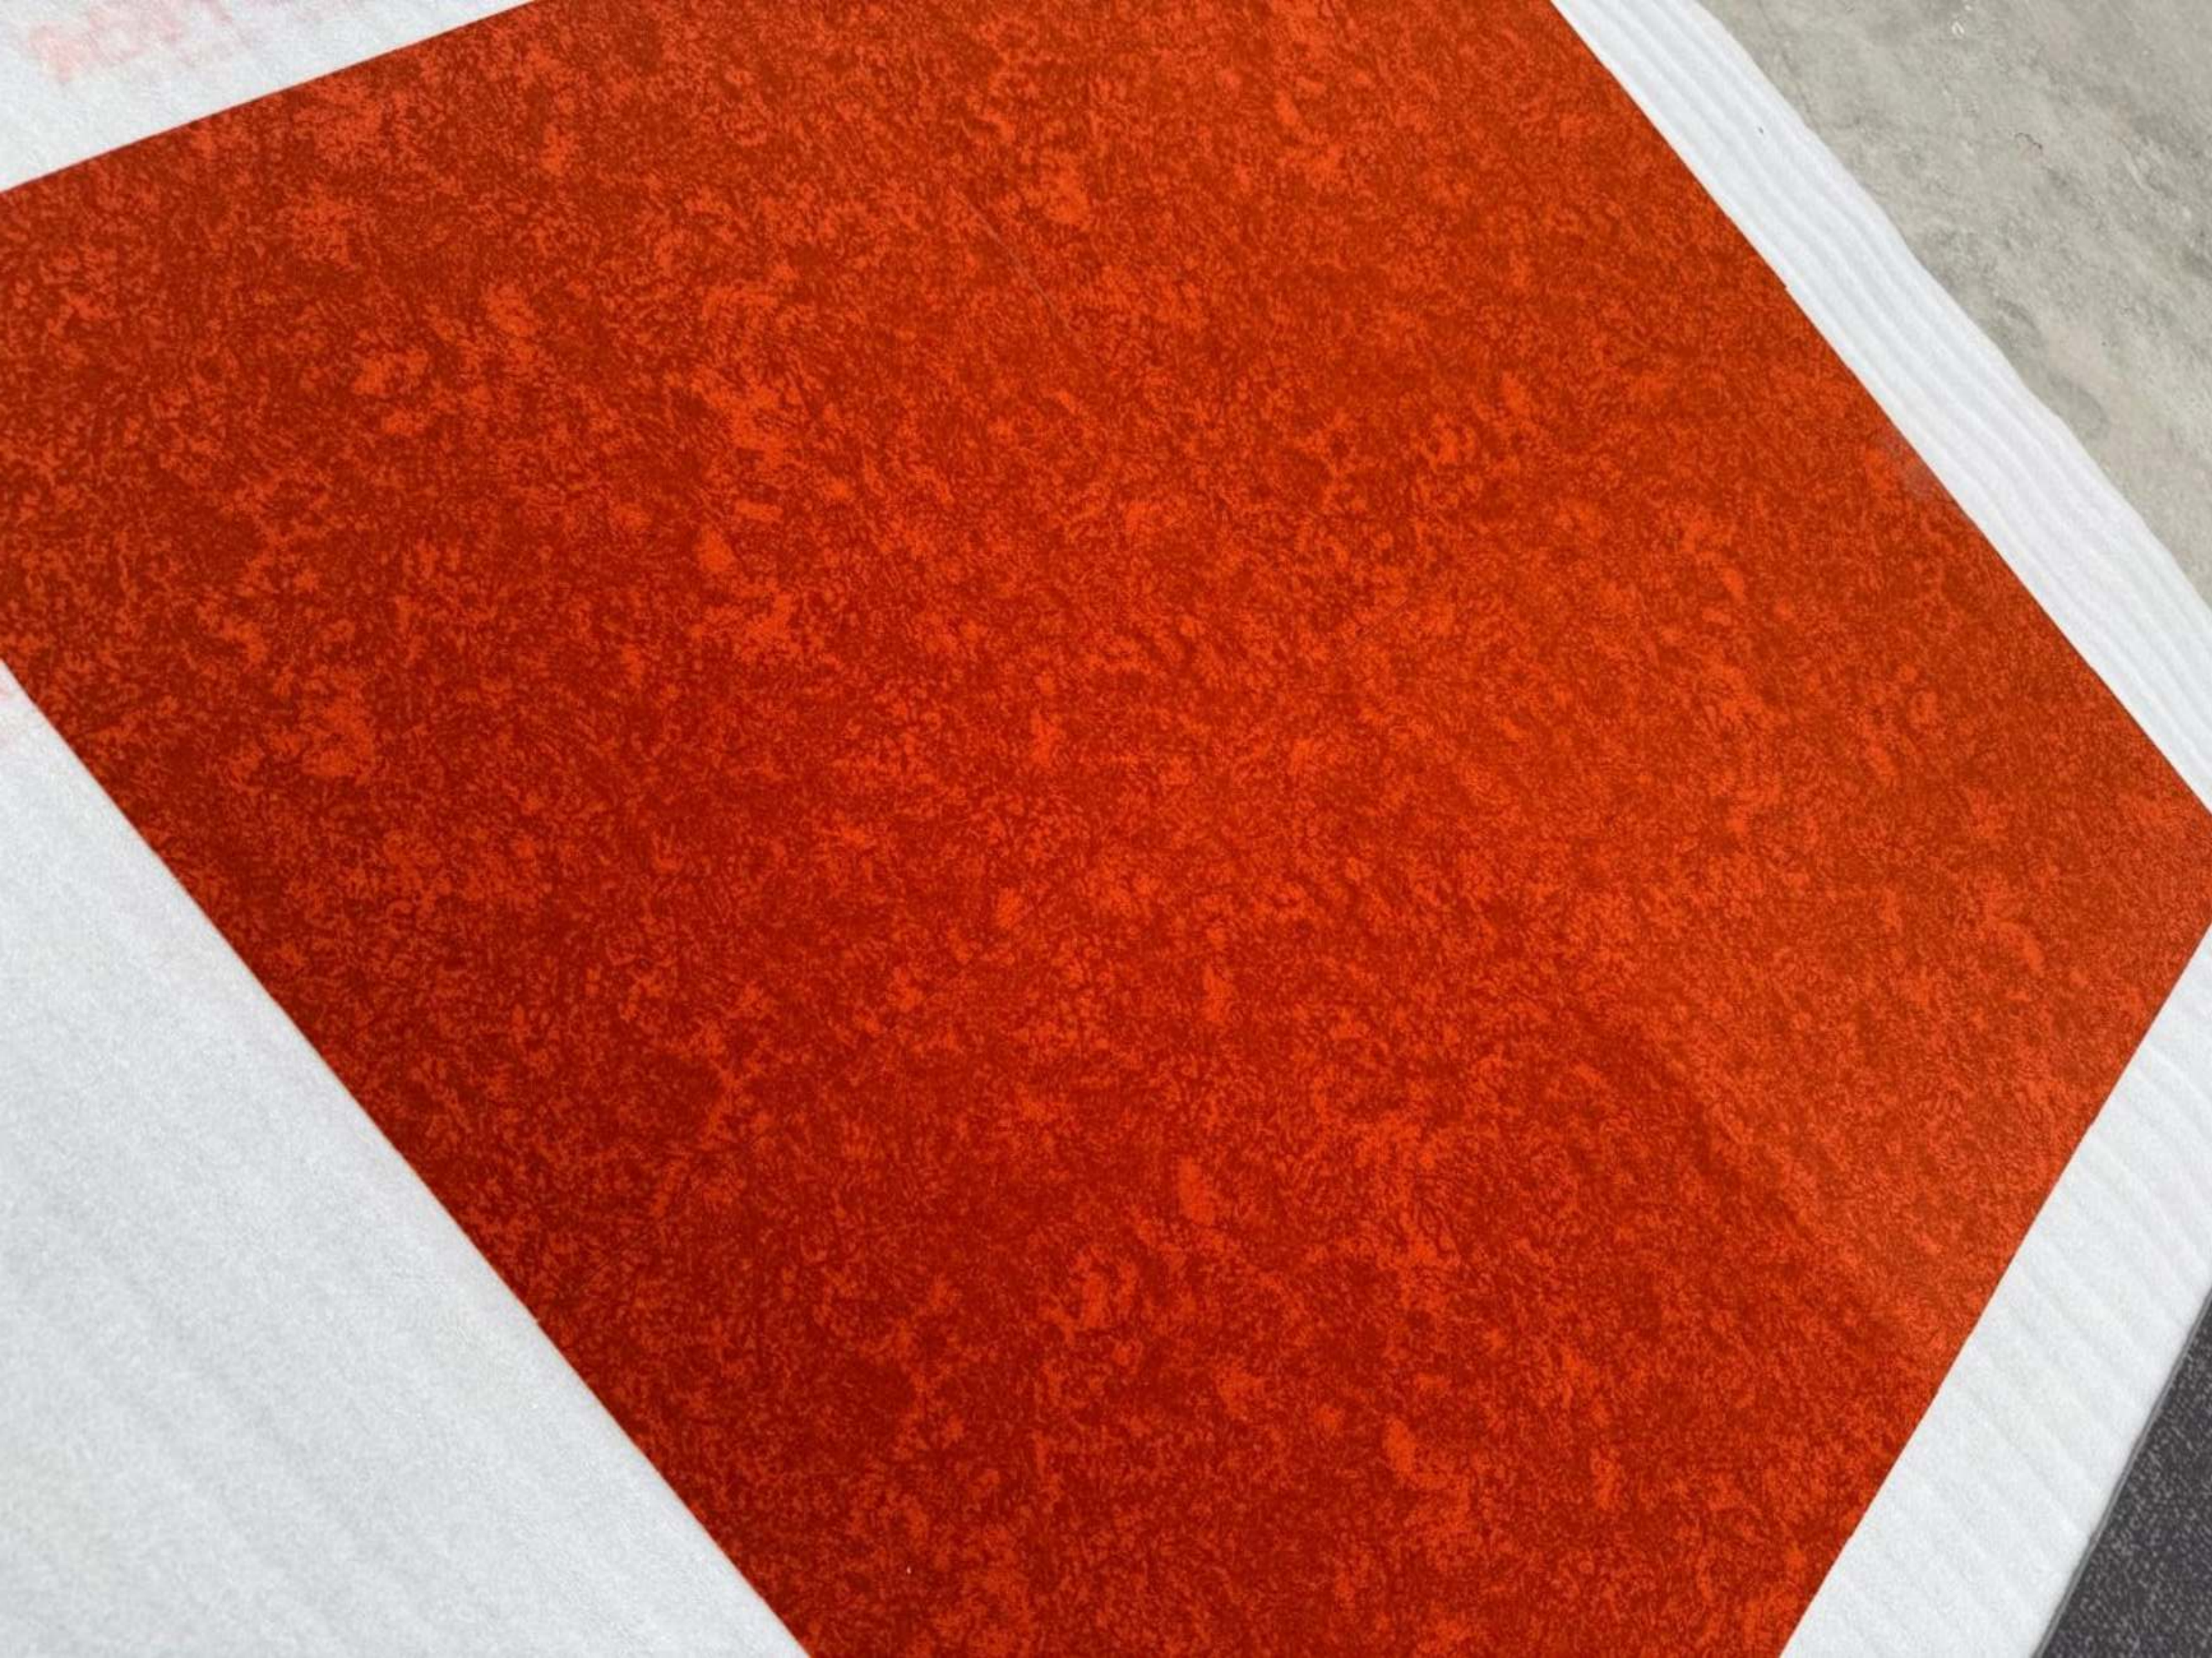


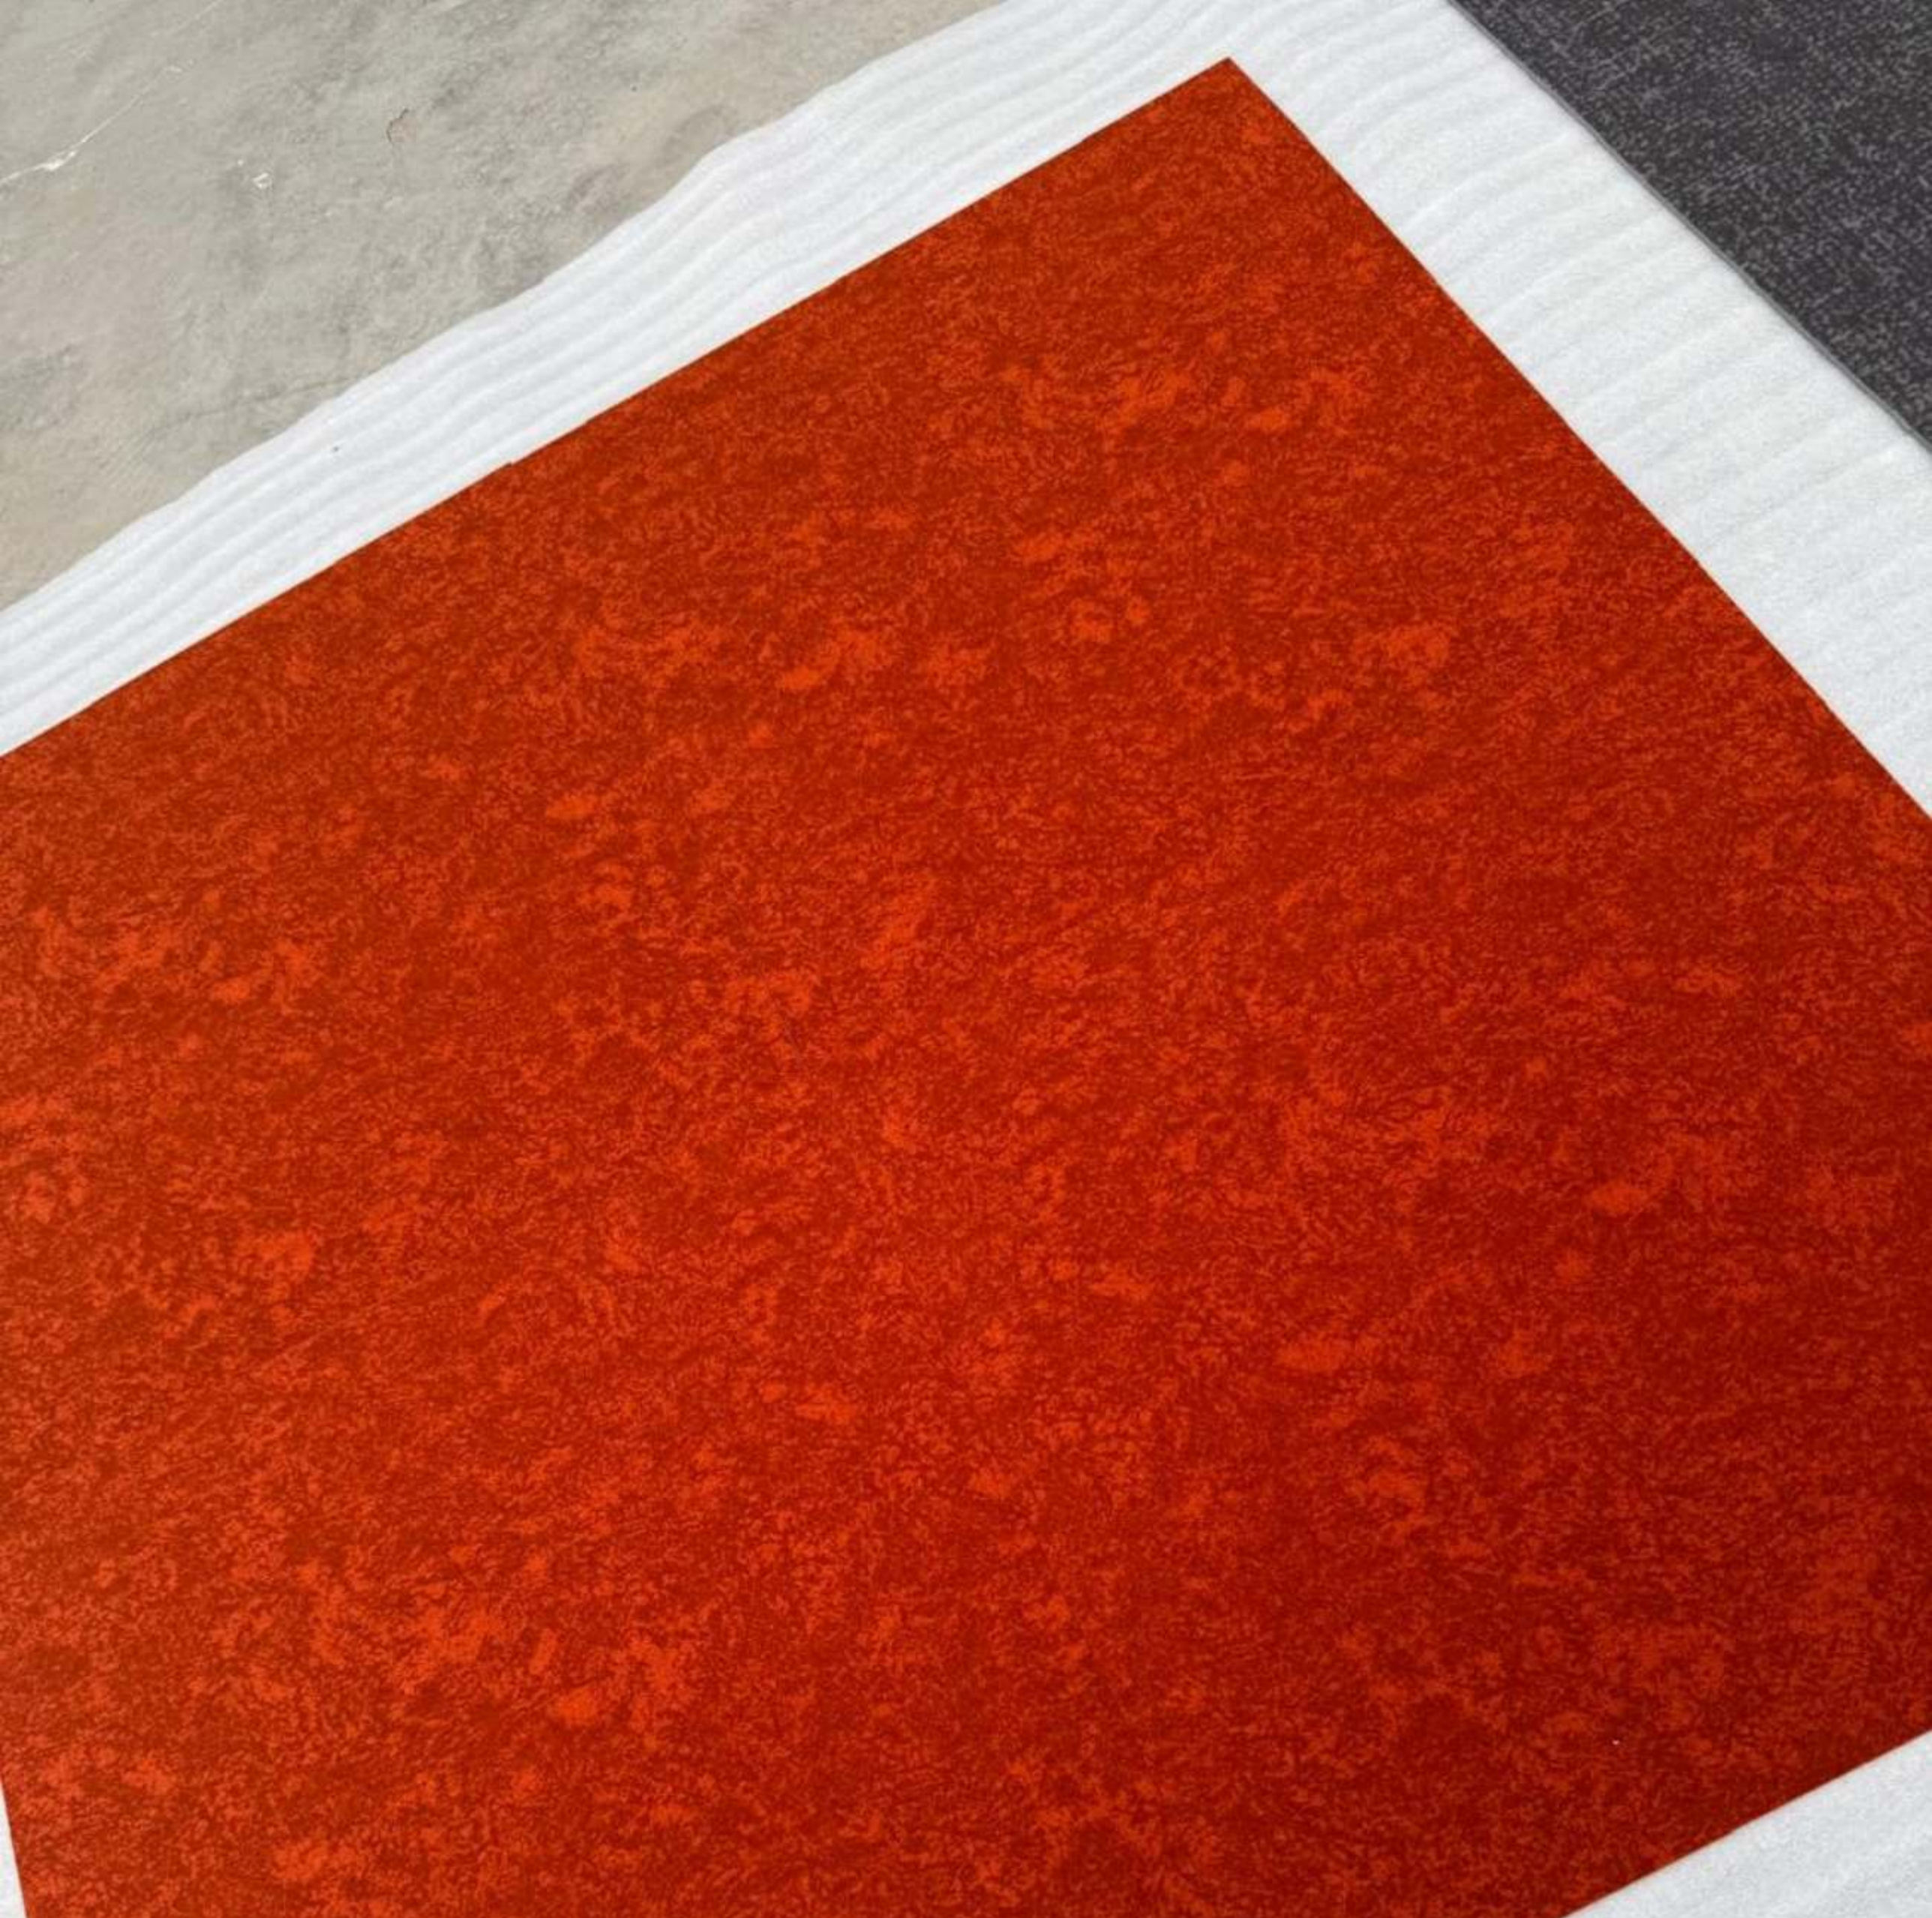




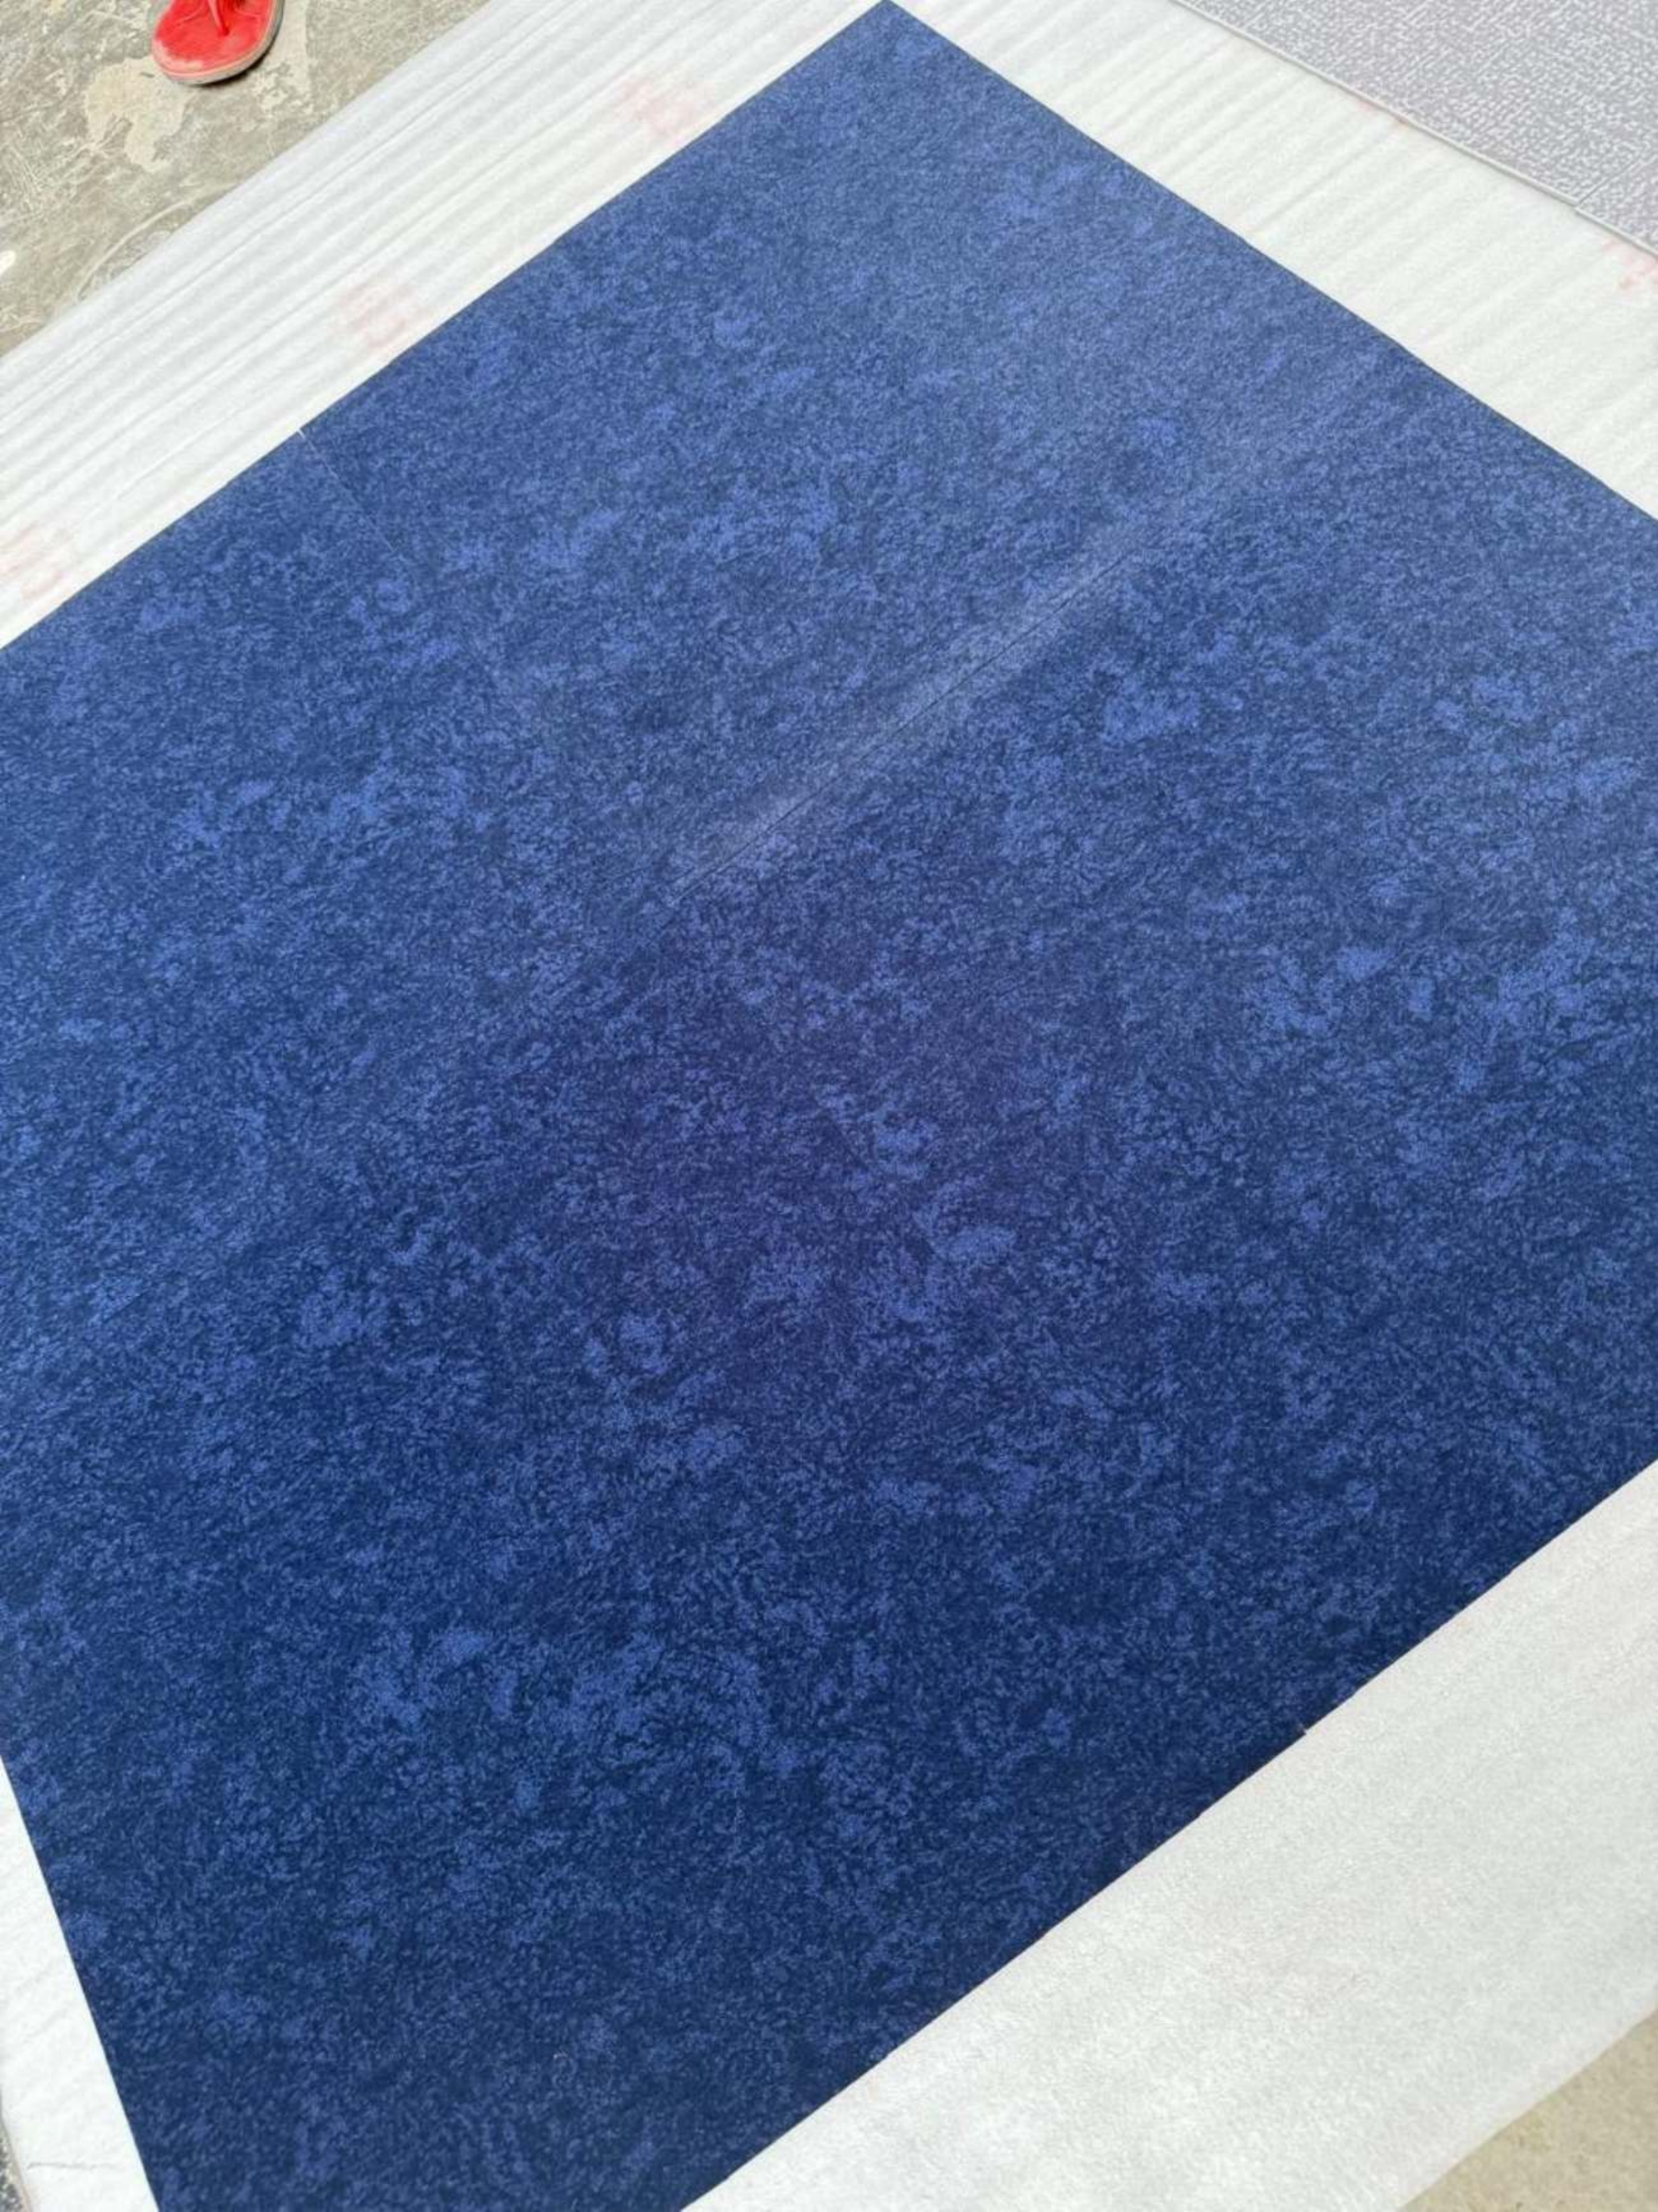

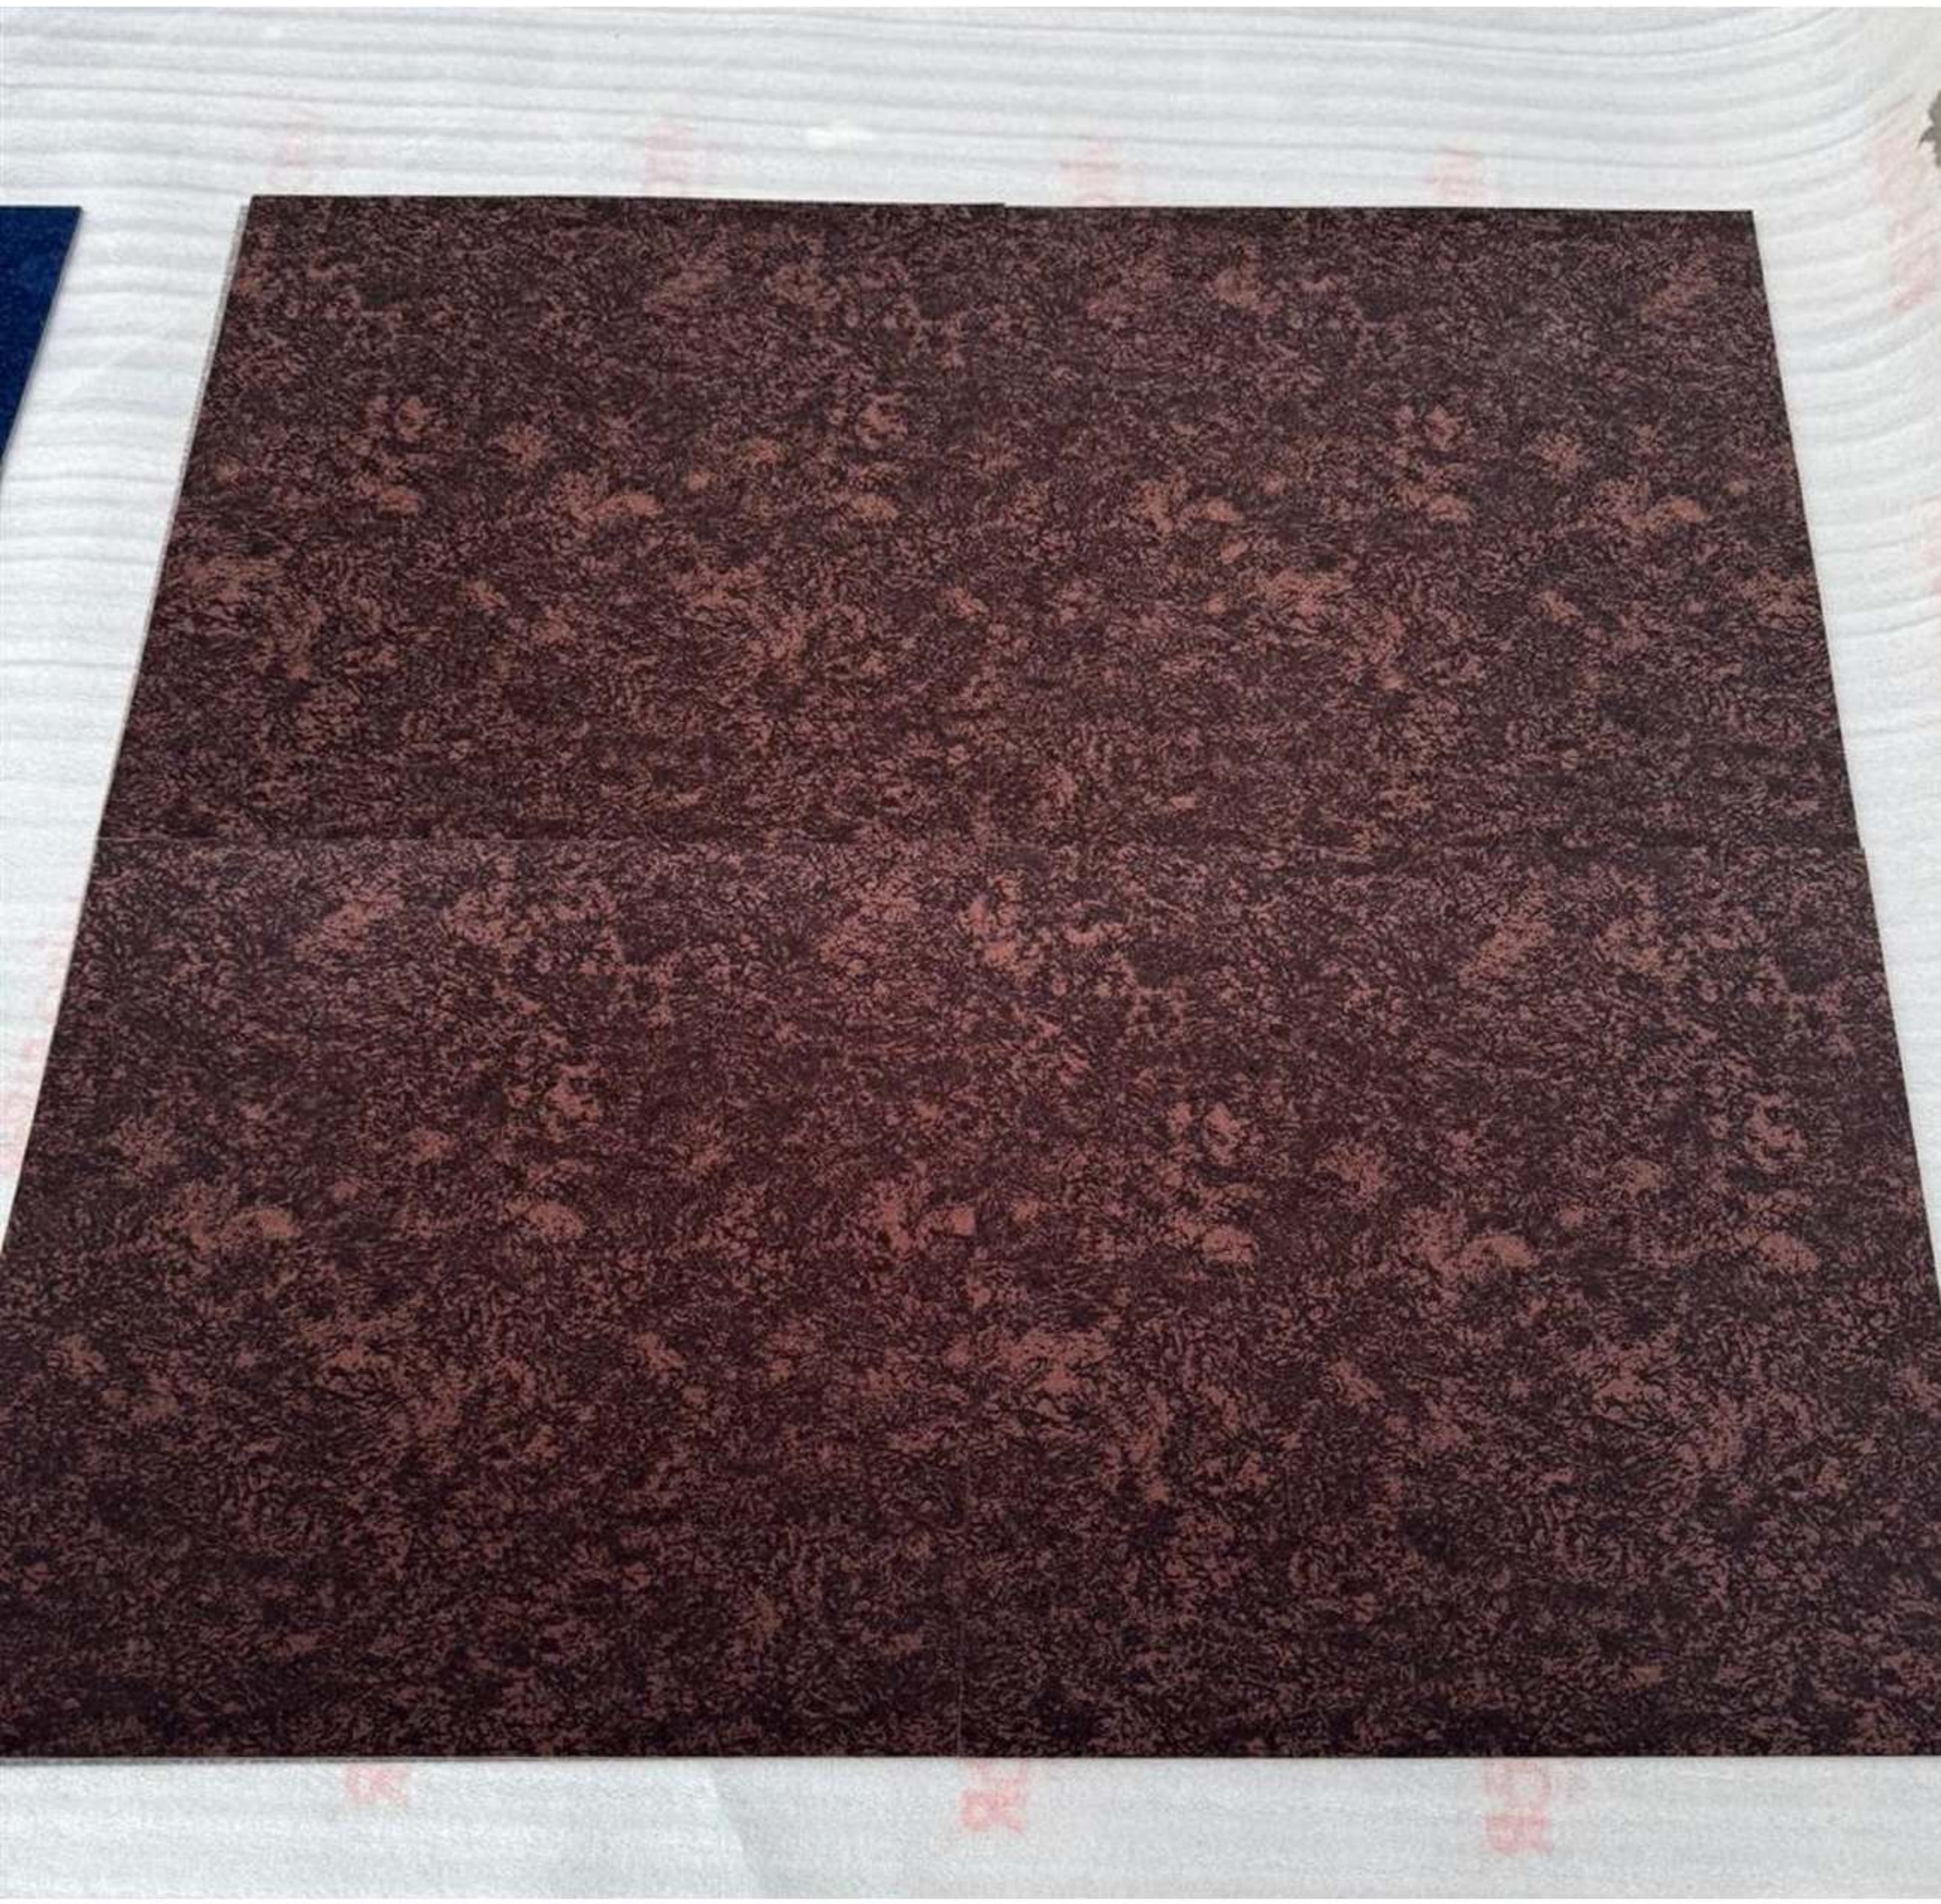

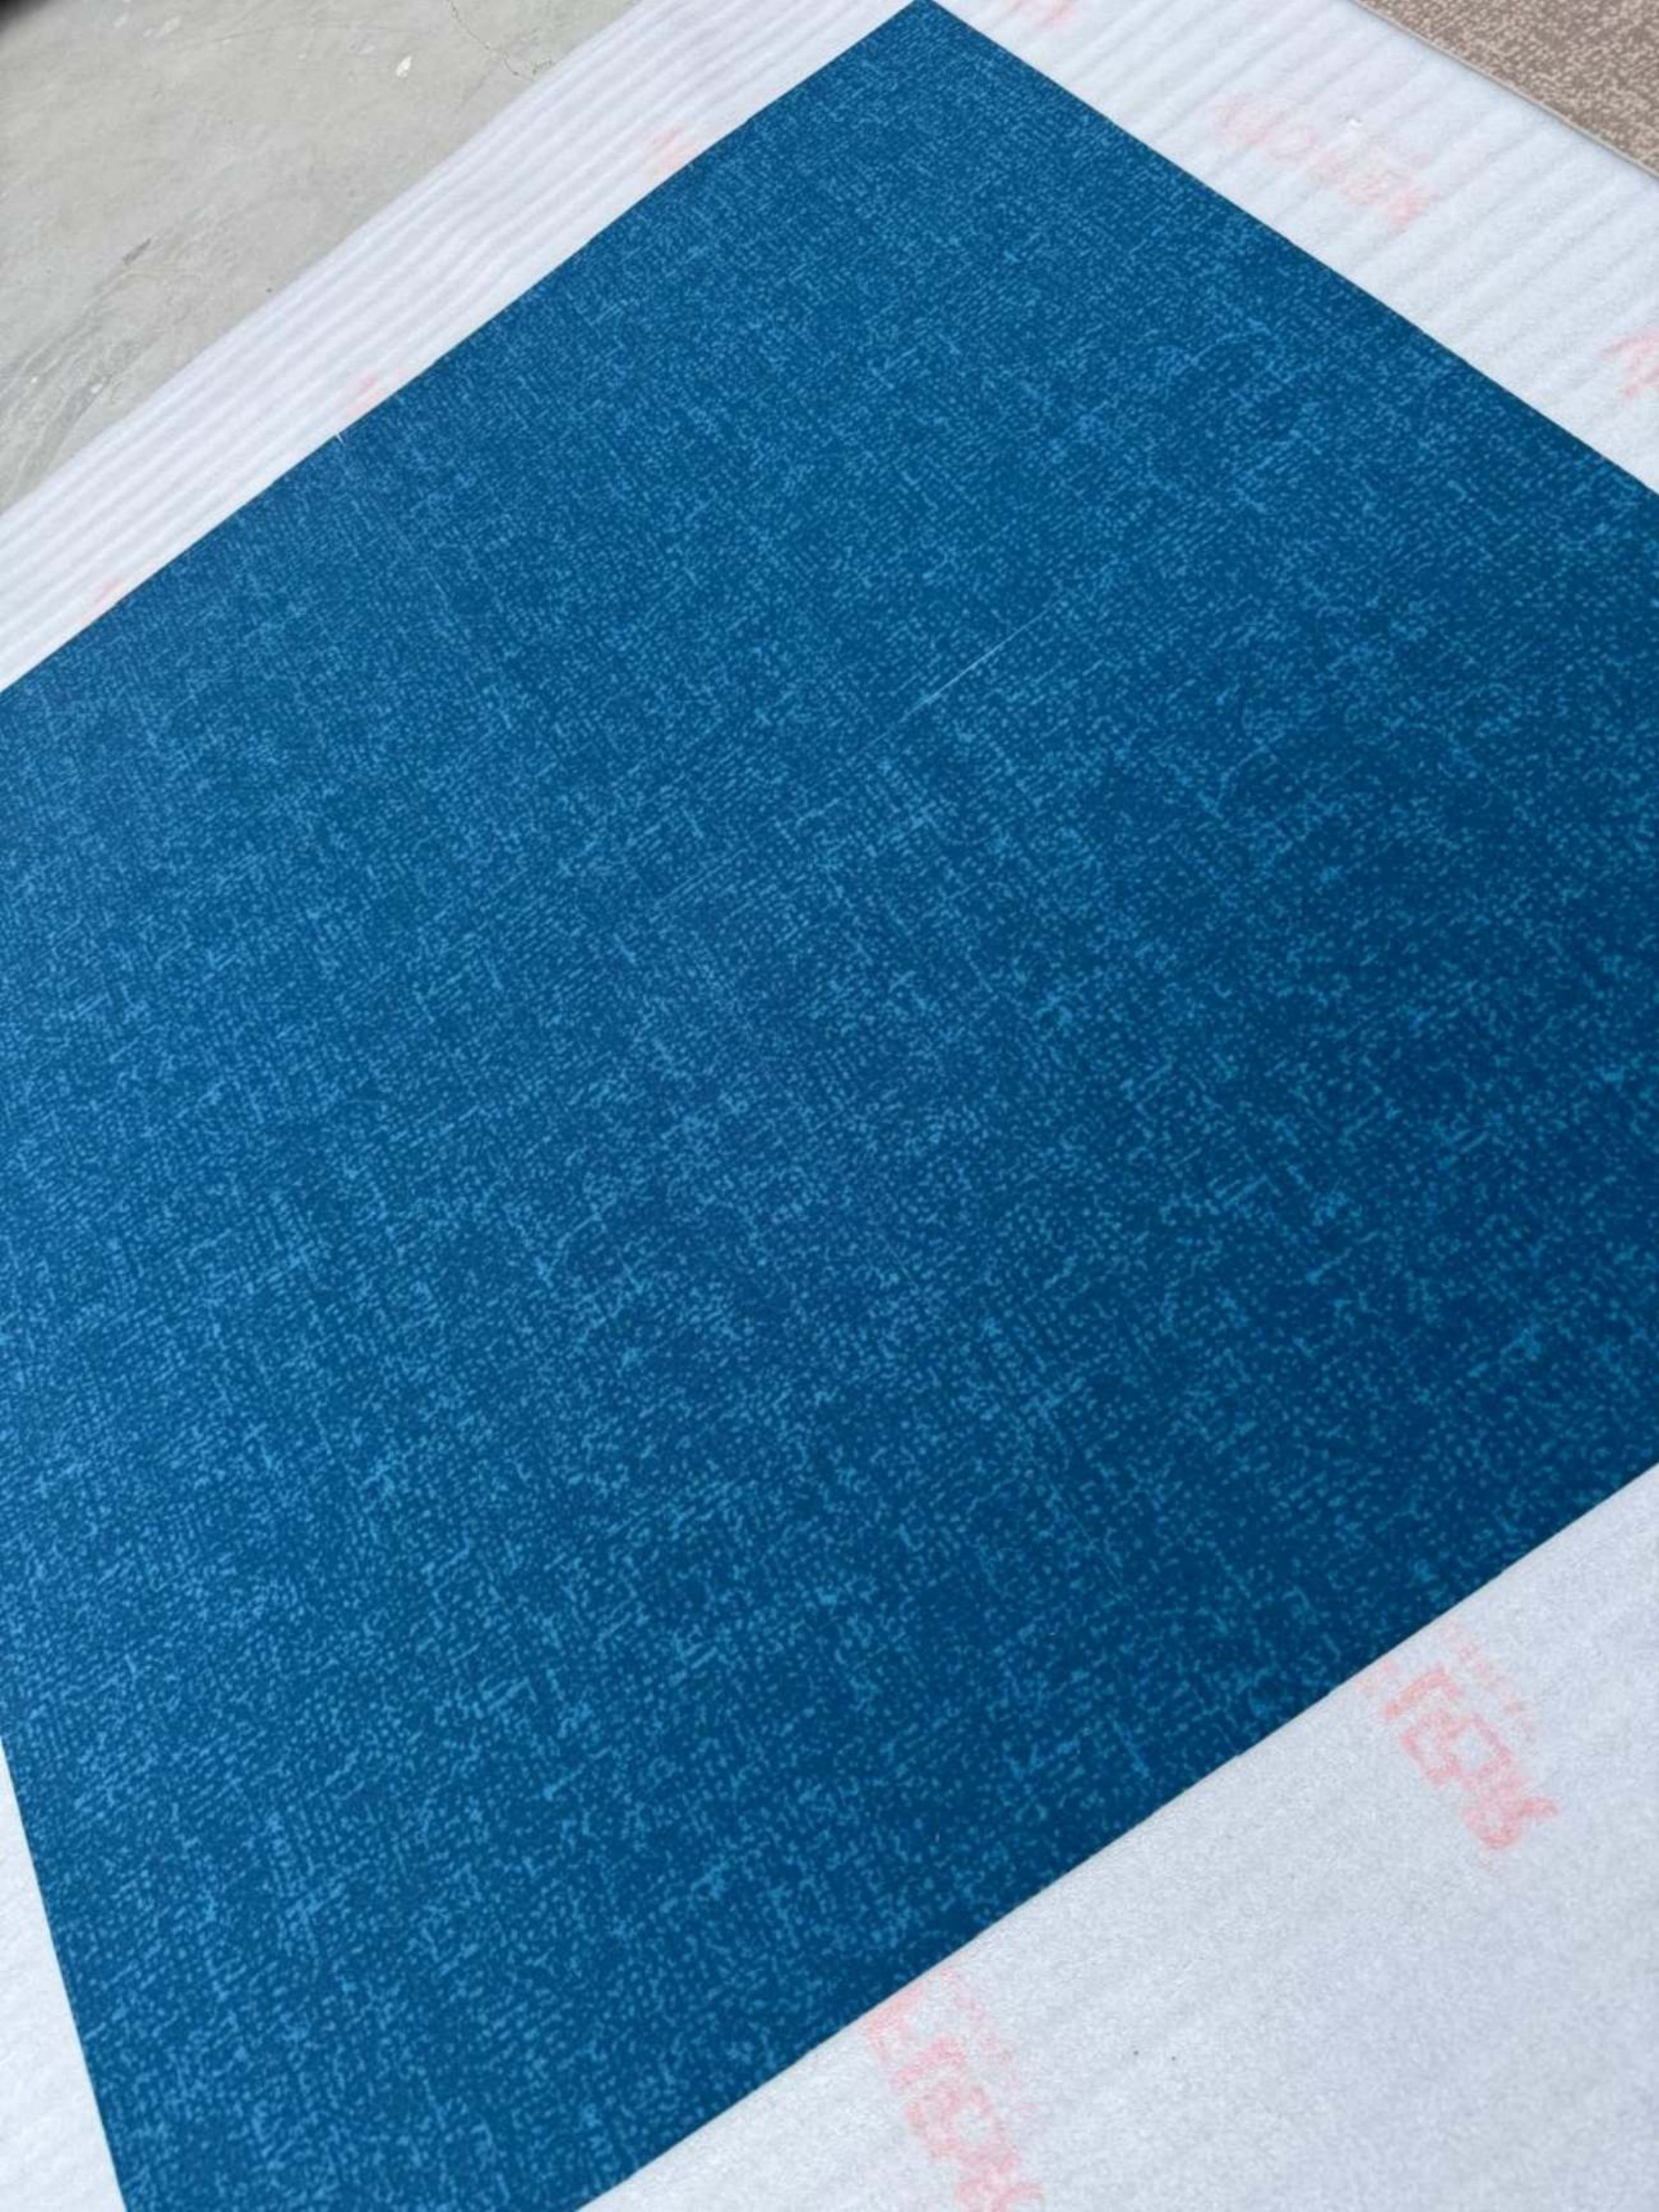



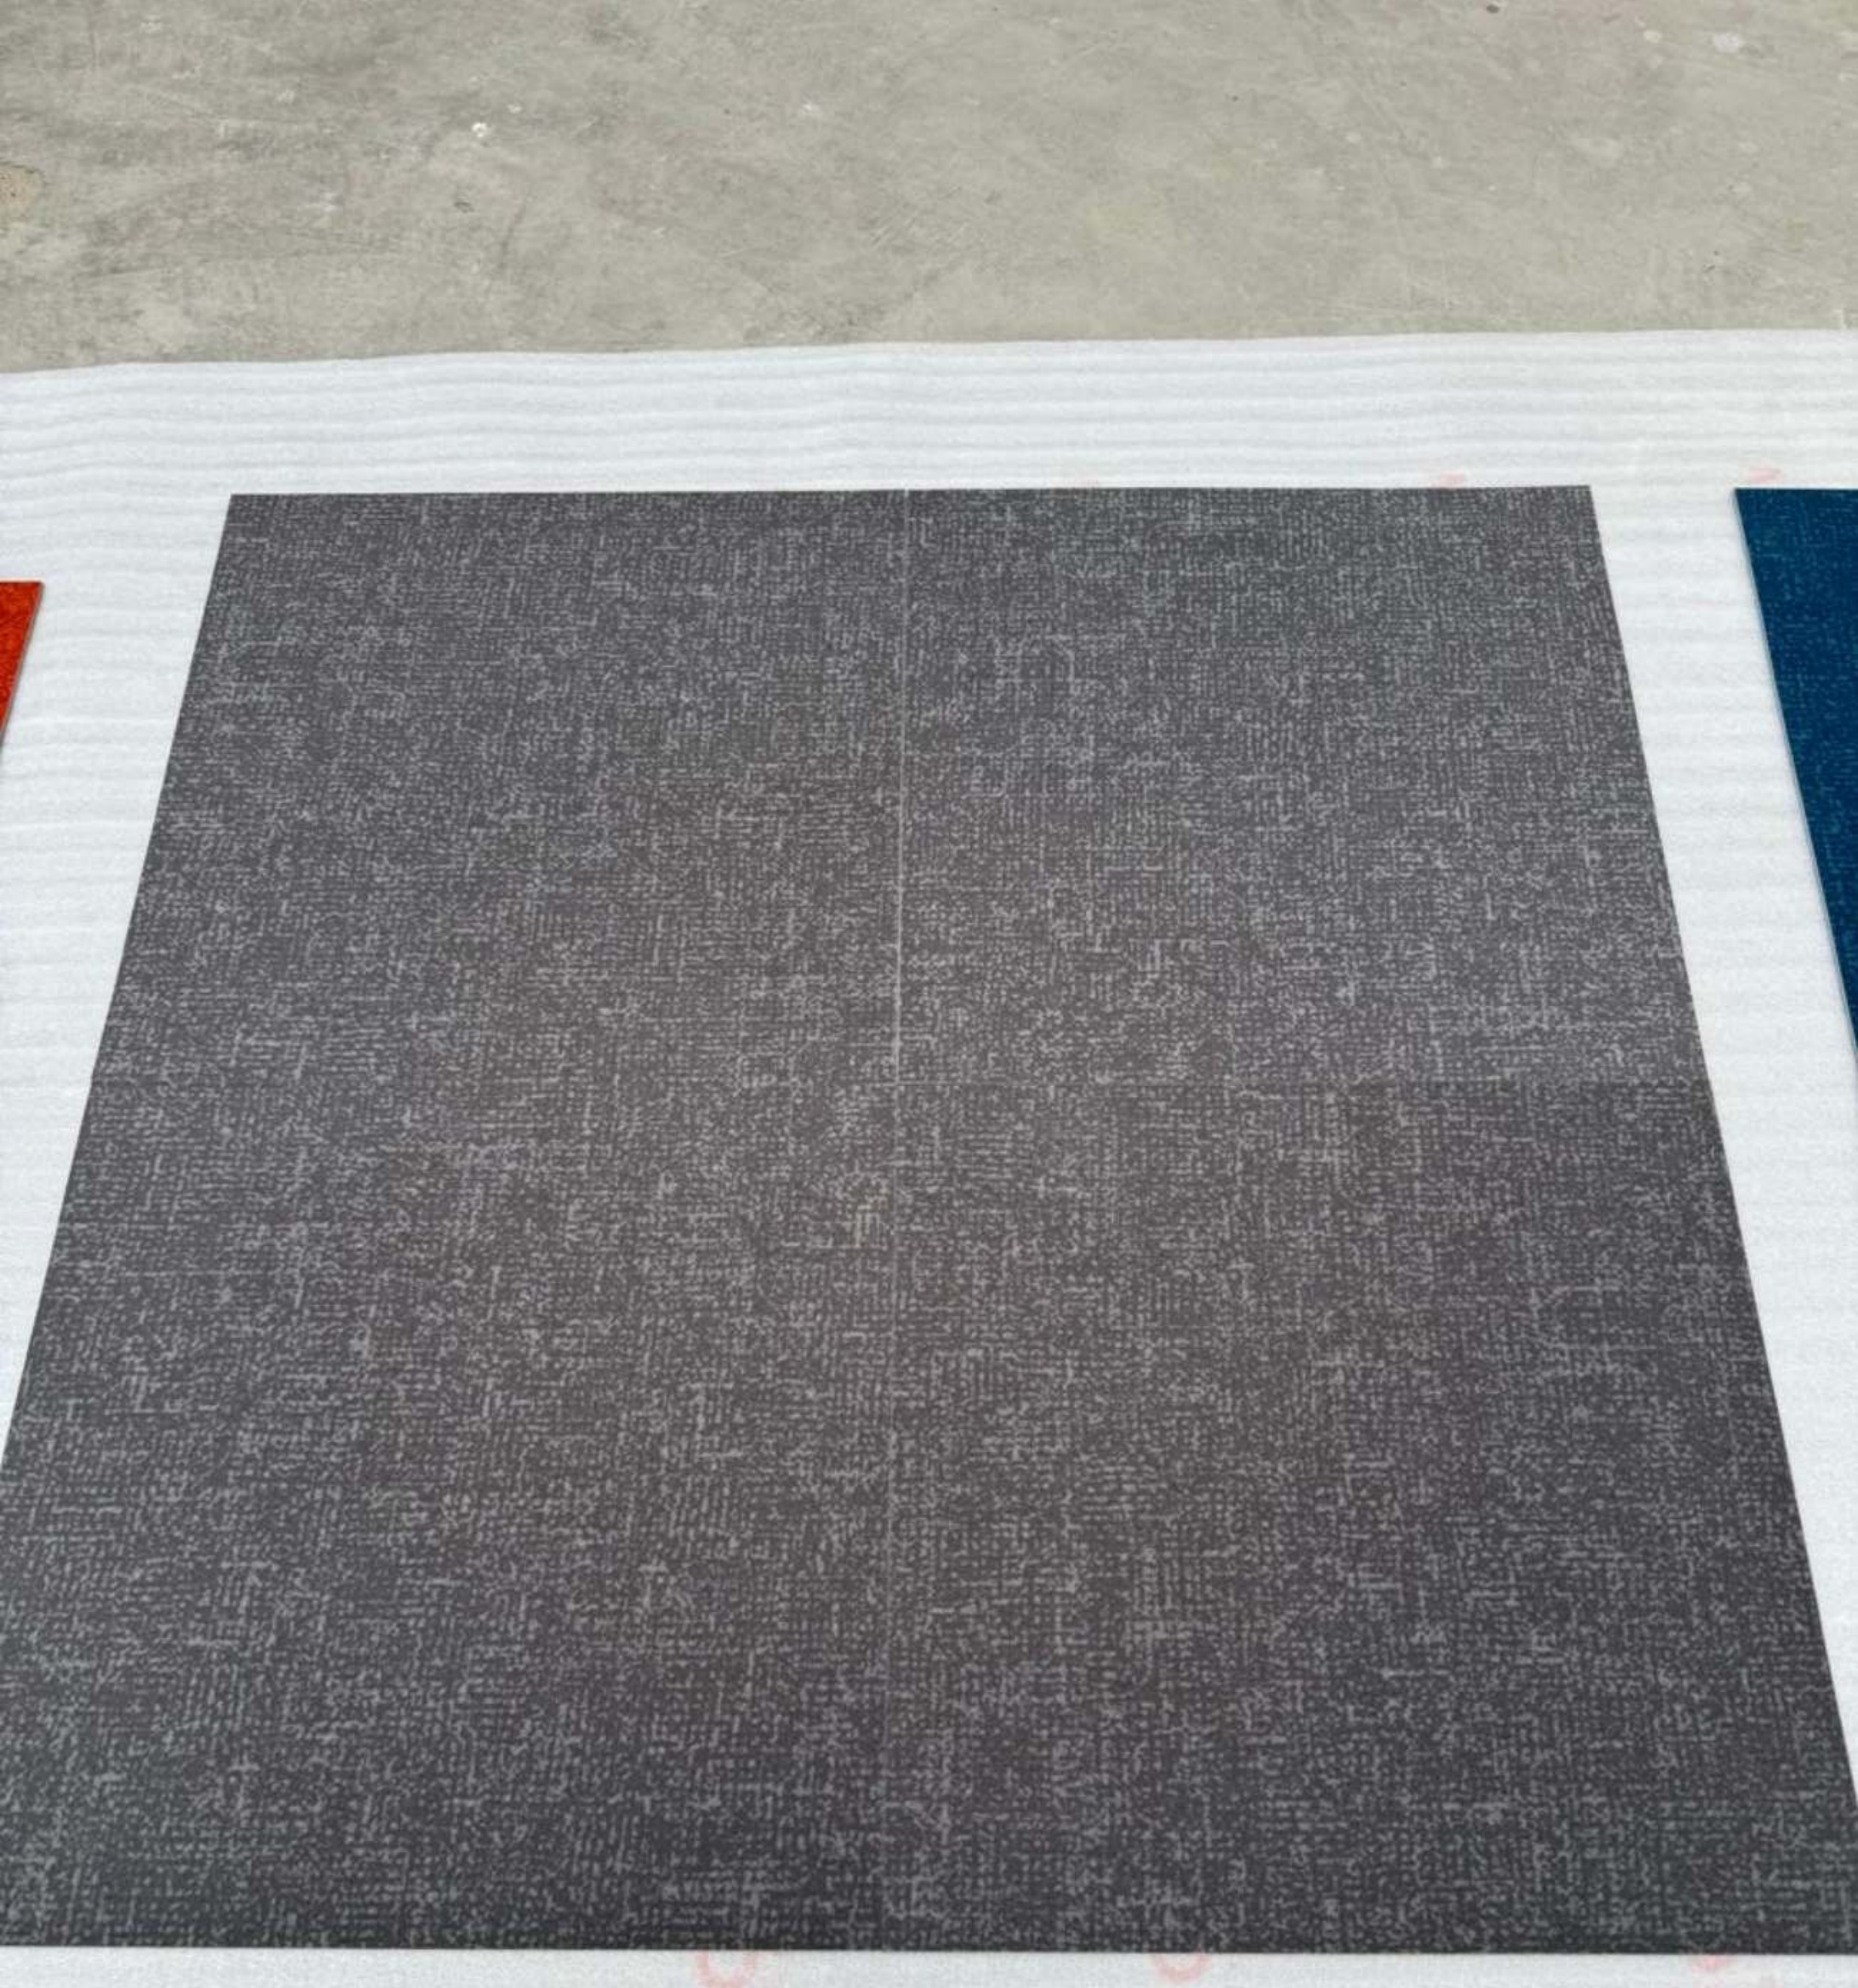










COMBI + UNDERLAY

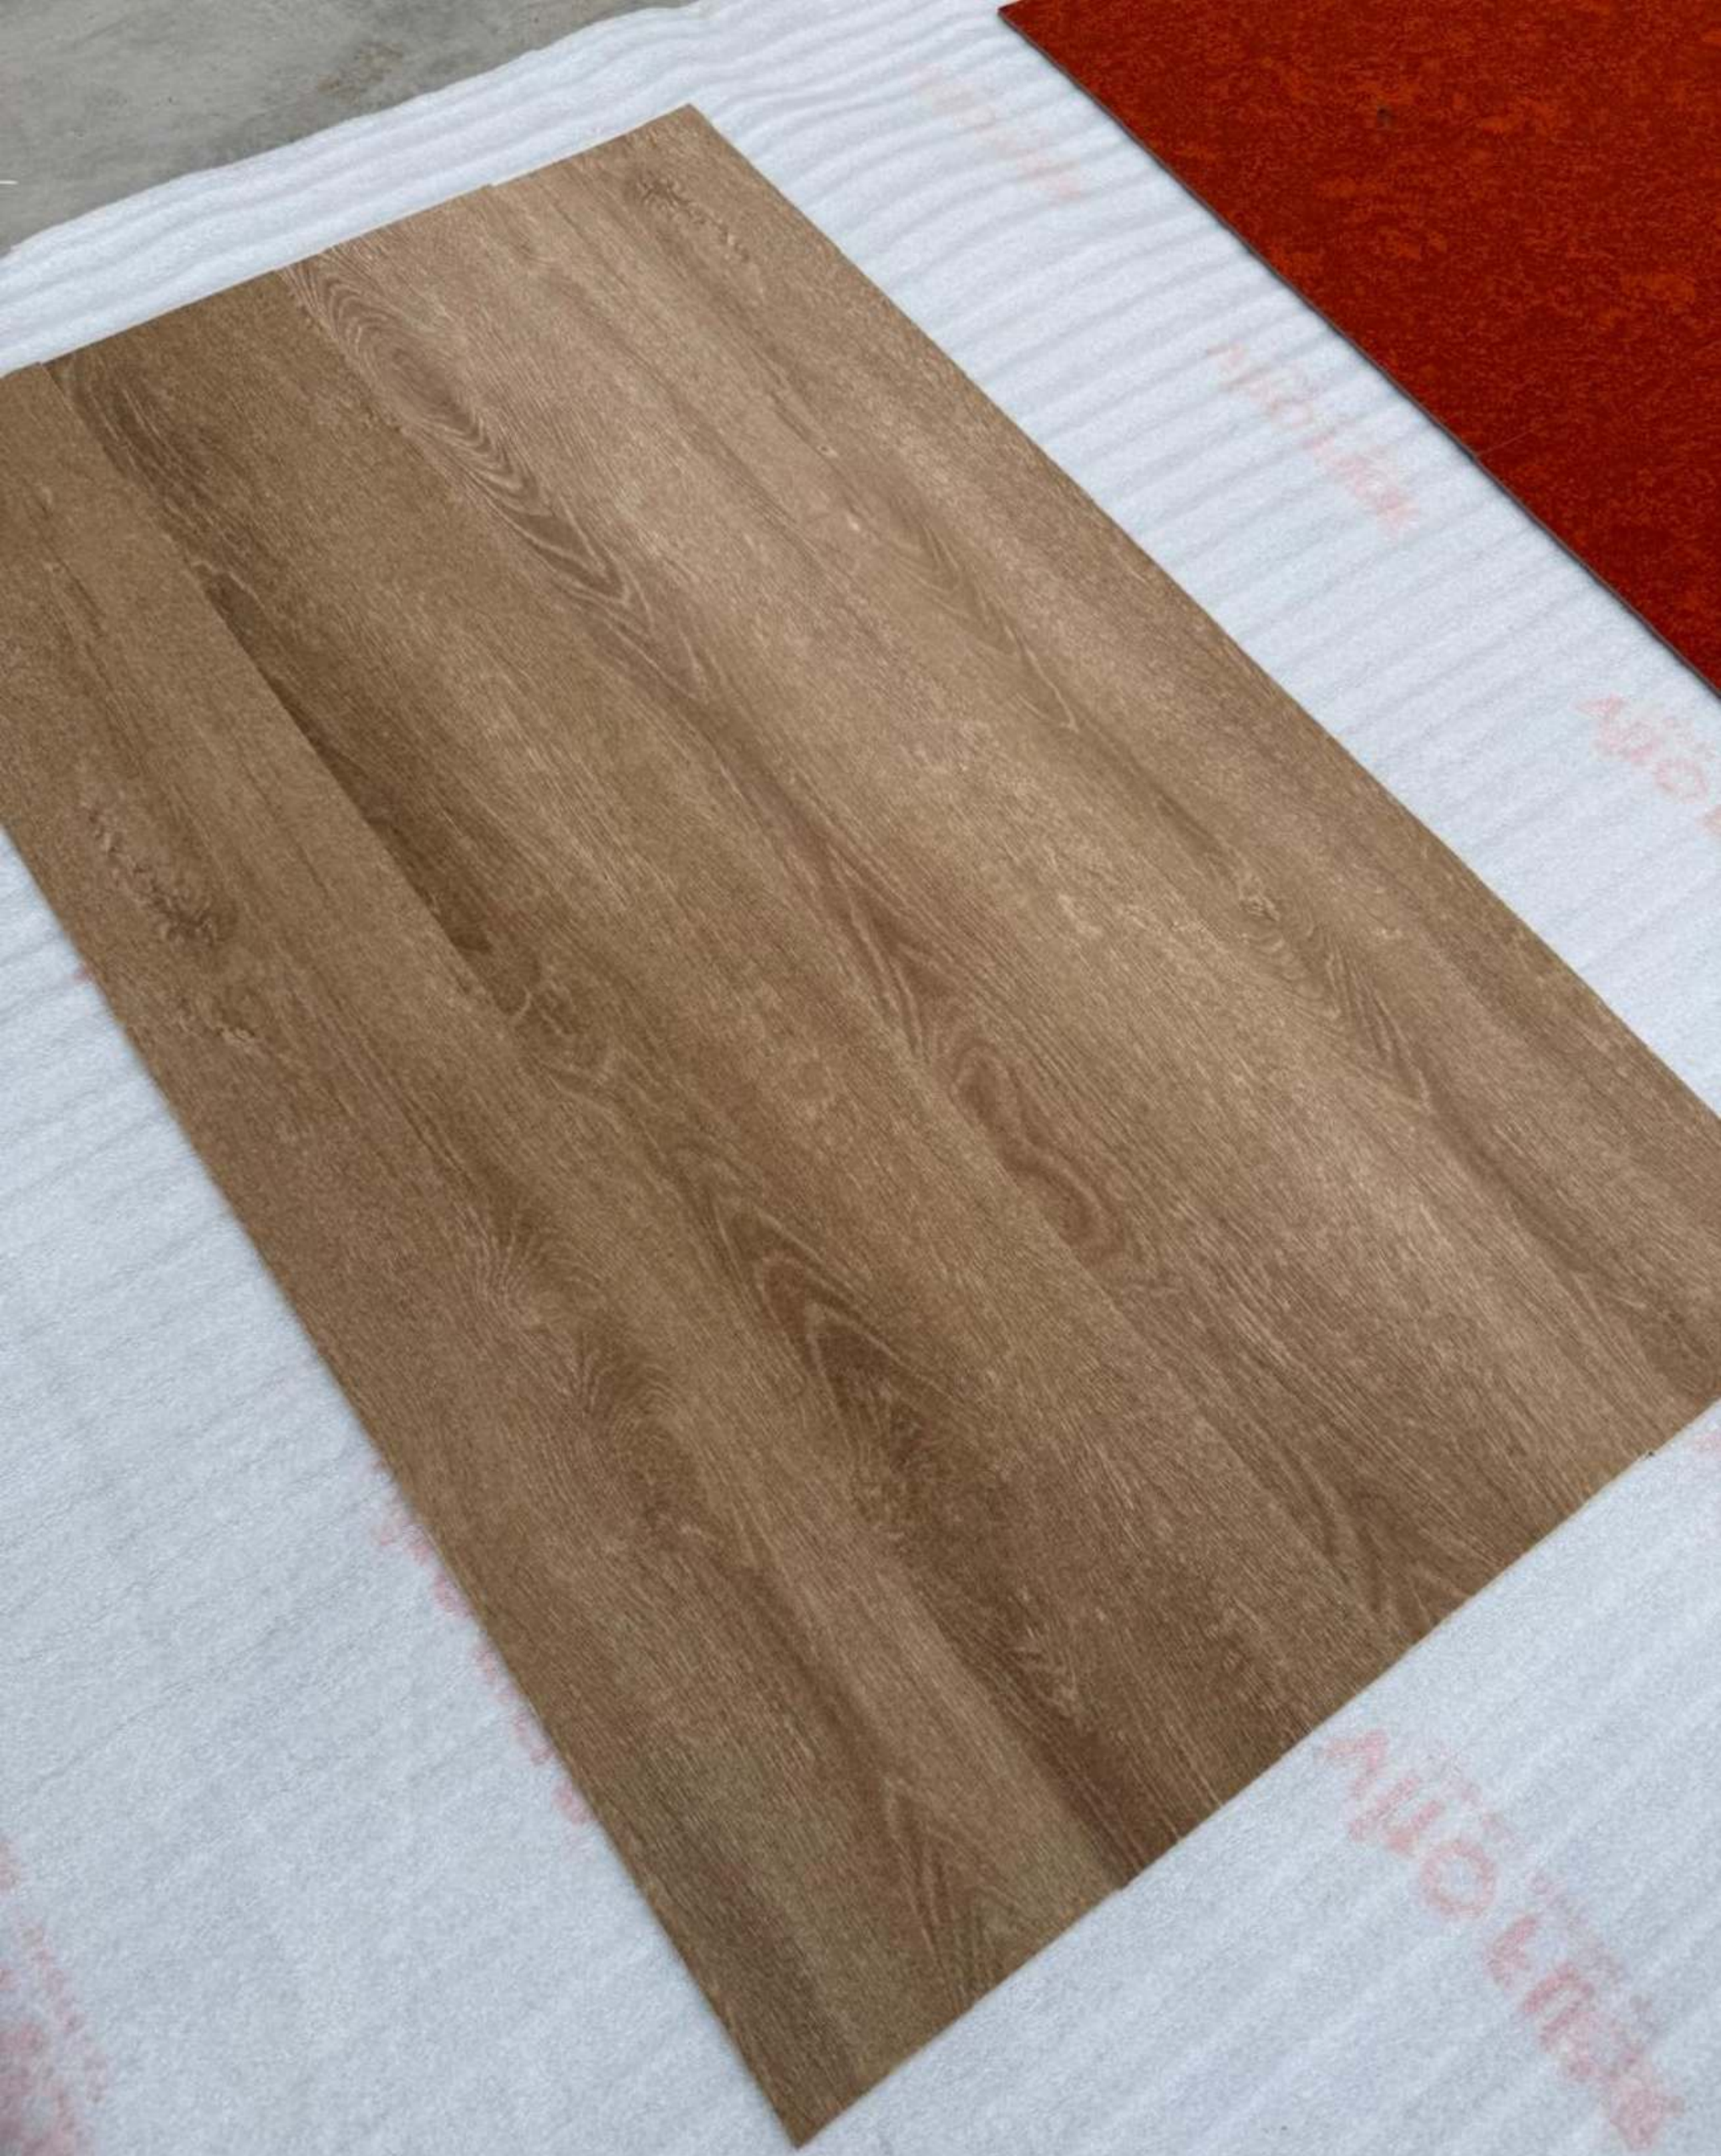

FLOCKING TECHNOLOGY

Nexflock carpet is manufacturer with High Voltage Electrostatic Flocking technology and made of the robust 100% nylon 6,6 fibres, which are upright firmly anchored to the base layer. There are over 80 million fibres per square meter, 10 times as normal fibre bonded carpets. It achieves not only excellent abrasion resistance and resilience, but also remarkable stain prevention and easy to clean properties.




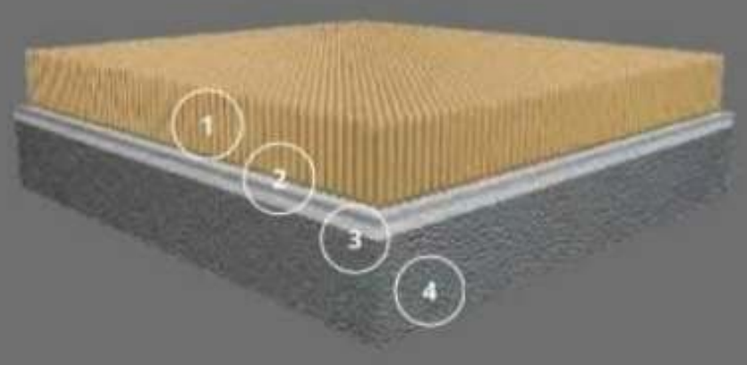

1. Nylon 6,6 Fibre
2. Dimensional stabilization layer
3. Fibreglass layer
4. PVC Backing layer

ABRASION RESISTANCE

Nexflock carpet plants over 80 million fibres of nylon 6,6 yarn in every square meter. It gives the carpet its excellent abrasion resistance and resilience. Its upright firmly anchored pile effectively prevents pilaments to pull-out or break in heavy traifci areas.

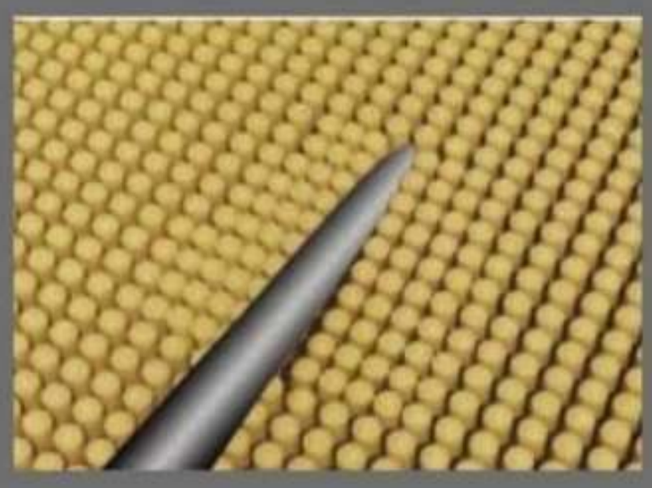


STAIN RESISTANCE

The high pile density of Nexflock carpet tiles makes it different to the normal fibre bonded carpets. With an even and dense pile structure, Nexflock carpet does not easily trap dirt and dust while its open pile structure makes the dirt and soil easier to be vacuumed. This makes it much easier to clean away any stains.



SOUND ABSORPTION

Nexflock carpet contains over 80 million nylon 6,6 fibres in every square meter, which creates innumerous sound absorption points. These waves, upon hitting the pile, are trapped and decayed rapidly.

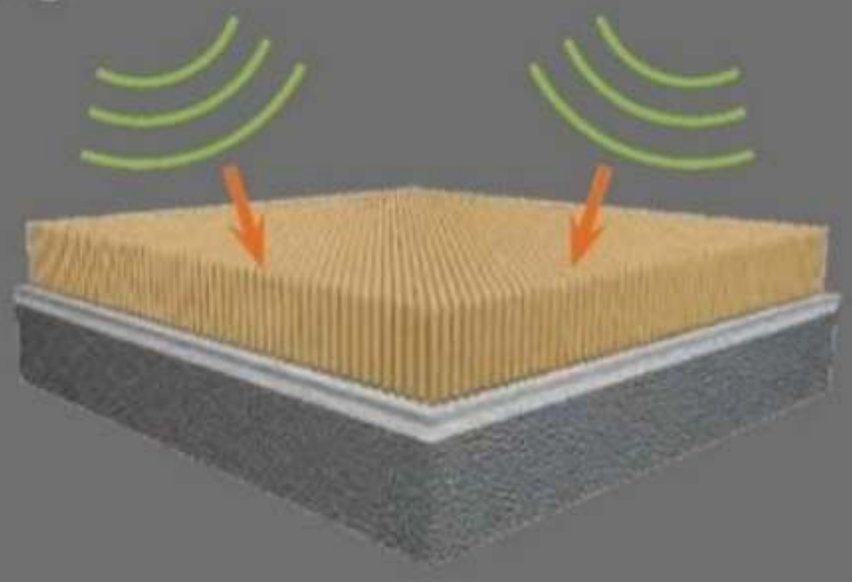

CIGARETTE SCORCH

Nexflock special technology can effectively prevent the cigarette scorch to generate in a time up to 10 times longer than a nylon 6 tufted carpet. It allows you to have enough time to pick up a light cigaretter without leaving a scorch on the carpet.



SPECIFICATION

Product	Flocking Carpet
Construction	Level Loop
Pile Fibre	100% Nylon 66 Fibre
Pile Density	80 million Fibres per m2
Tile Dimension	50 x 50cm / 15 x 100cm (Wood)
Tile Thickness:	5mm ± 0.5mm
Weight	5kg/m2
Backing	PVC with Fibreglass
Dimensional Stability	0.1%
Anti Static	2kv
Anti Microbial Activity Assessment	99.90%
Light Fastness	5
Rubbing Fastness	4
Water Fastness	4
Flame Retardant	B1
TVOC	0.5mg/m2 h (Class A)
Backing Delamination Strength	50N

NEXFLOCK

FLOCKING
CARPET TILE

Specifications are subject to manufacturing tolerances and may be changed without prior notice. Product may vary in colour from sample and between production lots. Images shown in e-catalog are for reference only and may not represent the actual color of product. All product purchases are subject to Vitofloor Standard Terms & Conditions of Sale. Please refer to our Technical Information Manual, Maintenance Guide & Warranty Guide for further clarification. © Vitofloor

VITO FLOOR | FLOORING • CLADDING • CARPETS

DESIGNED FOR PREMIUM SPACES

Flocking Carpet Tiles for Commercial & Luxury Interiors

WHERE CAN IT BE USED?

A refined flooring solution for spaces that value presentation, comfort and a professional finish.

DIAMOND & GEM INDUSTRY

Diamond companies, diamond factories, cutting and polishing units

JEWELLERY SHOWROOMS

Jewellery shops, luxury jewellery showrooms and retail counters

JEWELLERY MANUFACTURING

Jewellery workshops, production areas and design studios

CORPORATE & COMMERCIAL

Corporate offices, reception areas, meeting rooms and corridors

RETAIL & LUXURY BOUTIQUES

Premium retail stores, fashion boutiques and branded outlets

HOSPITALITY & BUSINESS SPACES

Hotels, business centres and selected indoor common areas

A SMART, MODERN FLOORING CHOICE

Available in contemporary colours and textures to complement professional interiors.
Refer to the catalogue for colour options and product specifications.