
EXCEL®
SKY
CARPET TILES
GREZZO

EXCEL®

Overview
FRESH CARPET
Looks



Grey



Yellow



Orange



Green



Blue



Red

NOTE

- Photos are showing only the design patterns.
- The color of the sample pasted is only showing part of the actual carpet.
- Specifications are subject to change when they improve product.
- Slight colour variations may occur from dye lot to dye lot.


Grey




Yellow



Orange + Grey



Green + Grey





Blue + Grey

SPECIFICATION

Product Name	SKY
Construction	Multi-level loop
Yarn Type	100% Polypropylene (PP)
Dye Method	100% Solution Dyed
Machine Guage	1/12"
Stitches	10 per inch
Pile Height	2.5~5.5mm(±0.5mm)
Total thickness	6.5mm (±0.5mm)
Pile Weight	610 g/m^2
Total weight	3300±100 g/m^2
Primary Backing	Non Woven Synthetic
Second Backing	Bitumen
Tile Size	50cm×50cm
Area of use	Heavy commercial
Packing	20 tiles/carton (5sqm/Carton)
Flammability	Passes ASTM D2859-16
Smoke Density	Passes ASTM E 662 < 450
Dimensional Stability	ASTM D7570/AACHEN < 0.2%
Tuft Bind	ASTMD1335 >7.8 lbs
Static Propensity	Passes AATCC-134 < 3.5KV
Stain Resistance	AATCC 175-2003 Rating 10
Colorfastness to Crocking	Rating 5, AATCC Test Method 165
Colorfastness to Light	Rating 5, AATCC Test Method 16.3
Indoor Air Quality	CRI Green Label Plus GLP1727


WARRANTIES

5 YEARS GENERAL WARRANTY

EXCEL IMPORT PVT LTD hereinafter called EXCEL CLASSIC FLOORS warrants to its customer that all polypropylene carpet tiles IMPORTED by EXCEL IMPORT PVT LTD will be first quality and will be free from manufacturing defects within general accepted standard of industry. If there is a manufacturing defect, a EXCEL representative must be notified immediately by the end user in writing. Written notification must include description of said defects, together with proof of purchase to the party (seller) from whom the product was purchased. Allow 2-4 weeks for processing.

After notification to EXCEL, EXCEL representative will, if necessary, inspect and verify the defect, if such defect is verified, EXCEL will, at its option, arrange for repair or replacement of the defective carpet.

INSTALLATION METHODS

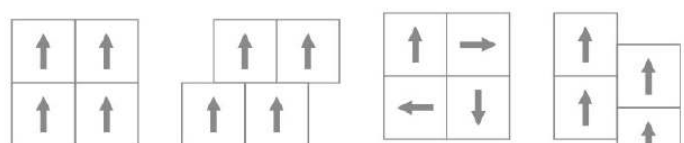

DISCLAIMERS

- According to international Carpet manufactured norms color may differ from dye lot to dye lot within tolerance.
- Please take note of the day lot number on the cartons before installing the tiles.
- Recommended laying of Carpet tiles : Checkered board pattern.